




# CITEL

INSTALLATION INSTRUCTIONS - NOTICE D'INSTALLATION  
 NOTICIA DE INSTALACION - INSTALLATIONSHINWEISE  
 ISTRUZIONI PER L'INSTALLAZIONE  
 INSTRUCOES DE INSTALACAO - MONTÁŽNÍ NÁVOD  
 РУКОВОДСТВО ПО МОНТАЖУ - 安裝指導書


Parafoudre Type 2 (ou Type 3) très compact pour éclairage à LED.  
 AC surge protector Type 2 (or Type 3) for LED lighting system.

Protección AC contra sobretensiones transitorias de Tipo 2 (o 3) para iluminación con tecnología LED.  
 Protezione AC contro sovratensioni di Tipo 2 (o 3) per l'illuminazione con tecnologia LED.  
 УЗМІІ переменного тока Класс 2 (или Класс 3) для светодиодных систем освещения.  
 Střídavá přepětová ochrana Typu 2 (nebo Typu 3) pro LED osvětlovací systémy.



## MLPC Range

## Application example

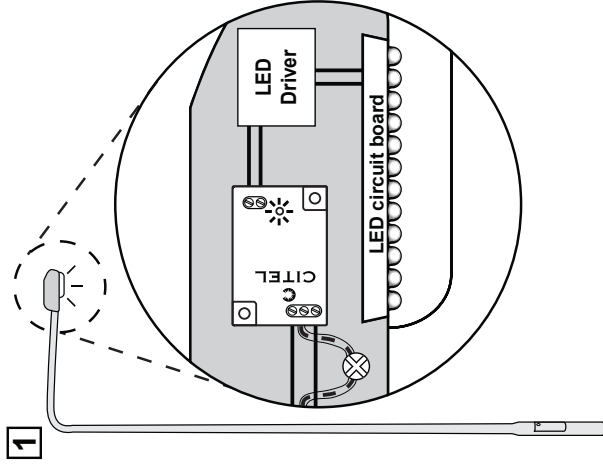


## Technical Data

2000 m max. 6500 ft max. -40/+85°C max. -40/+185°F max. Indoor use only	P/N
	MLPC1-277L-V/50
AC network	MLPC1-2-770L-V
120-277 Vac single phase	
Characteristics	
Connection by wire	
I <sub>max</sub>	10 kA
I <sub>pe</sub>	no current
Protection class	IP20



Table 1

## Wiring and installation

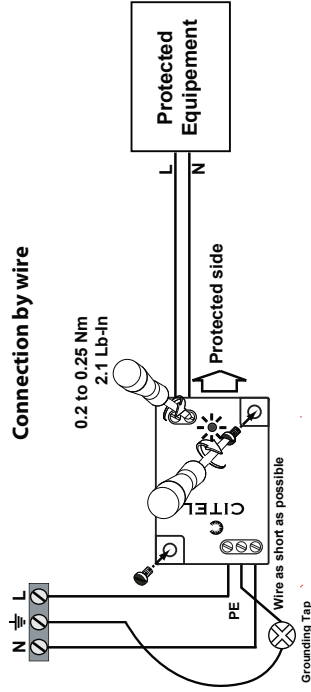

## Dimensions (in mm)

MLPC1-277L-V  
 MLPC1-277L-V/50

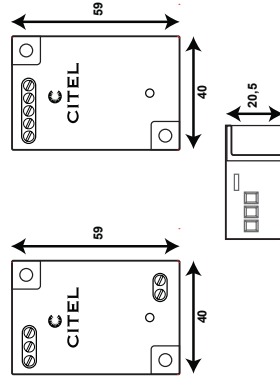

For all versions

## Maintenance

