





# CITEL

## UL497B LISTED - I<sub>max</sub> 20kA - I<sub>n</sub> 5kA - Modular


### DLA2-06D3



- Hybrid SAD-GDT Technology
- UL497B LISTED
- 20kA I<sub>max</sub> (1x 8/20us)
- 5kA I<sub>imp</sub> (2x 10/350us)
- 10kA I<sub>n</sub> (10x 8/20us)
- Modular
- 4W+SHIELD+G

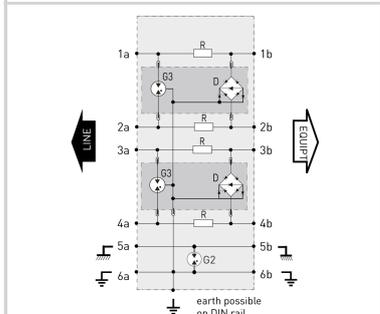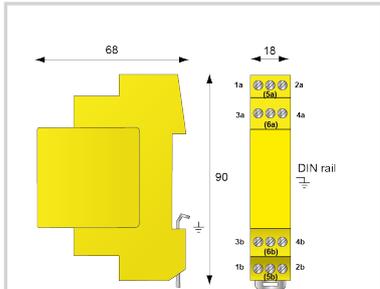

**G:** 3-electrode gas tube  
**Gb:** 2-electrode gas tube  
**R:** Resistor  
**D:** Clamping diode

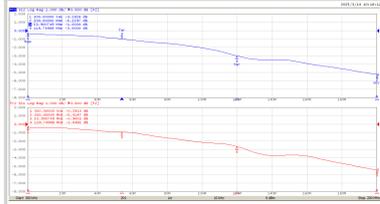

Electrical Characteristics	
Network	RS422
Nominal line voltage	Un 6 V
Max. DC operating voltage	Uc 8 Vdc
Cut-off frequency -3dB, 100 ohm system	f max. > 115 MHz
Cut-off frequency -1dB, 100 ohm system	f max. > 50 MHz
Max. load current @25°C	IL 300 mA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub> 20 kA
Nominal discharge current C2 Category	I <sub>n</sub> 5 kA
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)	Up 20 V
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)	Up 650 V
Impulse current D1 (10/350μs), 2 applications, X-C (Line/Earth)	I <sub>imp</sub> 5 kA
Line resistance (± 10%)	4.7 Ohm
Mechanical Characteristics	
Technology	GDT+TVS diode
Connection to Network	By screw terminal: cross section 0.5-2.5mm <sup>2</sup>
Format	Plug-in DIN box
Mounting	Symmetrical rail 35 mm (EN 60715)
Operating and storage temperature	-40/+85°C
Protection rating	IP20
Failsafe mode	Short-circuit
NETWORK CONFIGURATION	2 Channel (4W+SHIELD+G)
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
SPARE PART	DLA2M-06D3
Standards	
Certification	UL Listed
Environmental standards	EU RoHS
UL STANDARD	UL497B
UL CATEGORY	QVGQ
UL FILE NUMBER	E184939
STANDARDS	IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number	
<b>640111</b>	

