




# CITEL



## M50F-480D-B

- ▶ Hybrid MOV-GSG Technology
- ▶ UL1449 Type 1 LISTED
- ▶ 50kA Surge Current Rating per mode
- ▶ Extended life with no leakage current
- ▶ Visual LED fault indicator and audible alarm
- ▶ NEMA 6 (exceeds NEMA 4X or 4)
- ▶ 10-Year warranty

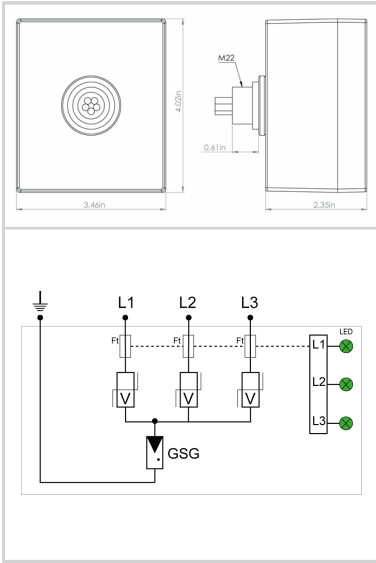

Electrical Characteristics		
POWER SPD TYPE		UL1449 TYPE 2 LISTED
VOLTS	(V)	480
AC/DC/DC PV/RF		AC
PHASE	(PH)	3D
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+80
MODES		L-L, L-G
VPR	(V)	2500/-/1500/-
MCOV	(V)	560/560/-/-
IN	(kA)	20
15 impulses 8/20µs		
SCCR	(kA)	150
IMAX	(kA)	50
8/20µs		
Installation		
Operating Temperature <sub>Min</sub>	°C	-40.0000
Operating Temperature <sub>Max</sub>	°C	85.0000
Operating Temperature <sub>Min</sub>	°F	-40.0000
Operating Temperature <sub>Max</sub>	°F	85.0000
Operating Relative Humidity <sub>Max</sub>	%RH	Can be submerged
Operating Altitude <sub>Min</sub>	Ft	2000.0000
Operating Altitude <sub>Max</sub>	Ft	6500.0000
Housing/Enclosure material		Aluminum cast
Mounting		Side mount
IP Environmental rating/IP		IP66
NEMA Environmental rating/NEMA		NEMA 6
Installation Location		Indoor / outdoor
Accessories		brackets
Product Dimension <sub>L</sub>	mm	102.0000
Product Dimension <sub>H</sub>	mm	62.0000
Product Dimension <sub>W</sub>	mm	88.0000
Product Dimension <sub>L</sub>	In	4.0160
Product Dimension <sub>H</sub>	In	2.4410
Product Dimension <sub>W</sub>	In	3.4650
Miscellaneous		
Individual Pack		Yes
Storage Temperature <sub>Min</sub>	°C	-40.0000
Storage Temperature <sub>Max</sub>	°C	85.0000
Storage Temperature <sub>Min</sub>	°F	-40.0000
Storage Temperature <sub>Max</sub>	°F	85.0000
Mechanical Characteristics		
TECHNOLOGY		MOV-GSG
NETWORK CONFIGURATION		3PH, 3W+G, Delta
CONNECTION METHOD		36° #12 AWG LEADS
MOUNTING		SIDE MOUNT, THREADED M22 (1/2" NPT ADAPTER)
MATERIAL		Aluminum cast
NEMA RATING (IP RATING)		6
FAIL-SAFE BEHAVIOR		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		LED and audible alarm
DIMENSIONS		See diagram
WEIGHT		2.5 lbs.
Standards		
Environmental standards		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993



CITEL

M50F-480D-B

Part number

750714

