




# CITEL

## UL TYPE 4CA - I<sub>max</sub> 75kA - I<sub>n</sub> 20kA - Modular

### DS71US-150



- Multi-MOV Technology
- UL1449 Type 4CA
- 75kA Surge Current Rating per module
- Visual fault indicator and remote contacts
- Replaceable Modules
- 10-Year warranty

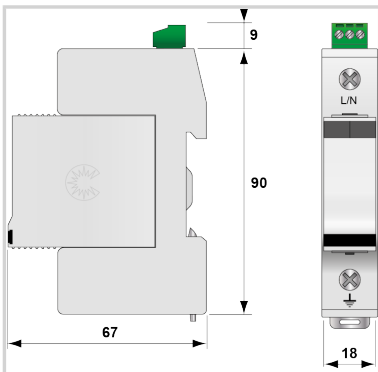

Electrical Characteristics		
POWER SPD TYPE		UL1449 5th Ed. TYPE 4CA
VOLTS	(V)	120
AC/DC/DC PV/RF		AC
PHASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODES		L-G
MLV	(V)	1100
MCOV	(V)	150
IN	(kA)	20
15 impulses 8/20 $\mu$ s		
SCCR	(kA)	n/a
Mechanical Characteristics		
TECHNOLOGY		Multi-MOV
NETWORK CONFIGURATION		2 wires
CONNECTION METHOD		Screw Terminal, 13-2AWG Solid Wire, 13-4AWG Stranded Wire
MOUNTING		Din Rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
Standards		
Certification		UL Recognized
Environmental standards		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA2, VZCA8
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number		
<b>32161155</b>		

