




# CITEL

## UL TYPE 4CA - I<sub>max</sub> 75kA - I<sub>n</sub> 20kA - Modular

### DS71US-150



- Multi-MOV Technology
- UL1449 Type 4CA
- 75kA Surge Current Rating per module
- Visual fault indicator and remote contacts
- Replaceable Modules
- 10-Year warranty

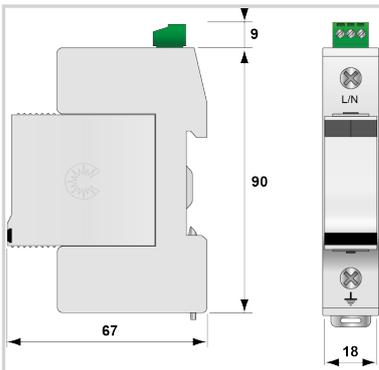

Características eléctricas		
POWER SPD TYPE		UL1449 5th Ed. TYPE 4CA
TENSION	(V)	120
AC/DC/DC PV/RF		AC
FASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+85
MODOS		L-G
MLV	(V)	1100
MCOV	(V)	150
IN	(kA)	20
I <sub>cc</sub> cortocircuito	(kA)	n/a
Características mecánicas		
TECNOLOGIA		Multi-MOV
CONFIGURACION DE RED		2 wires
FORMA DE CONEXION		Screw Terminal, 13-2AWG Solid Wire, 13-4AWG Stranded Wire
MONTAJE		Din Rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DESCONEXION SEGURA		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
Normas		
Certificación		UL Recognized
Normas ambientales		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA2, VZCA8
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Código		
<b>32161155</b>		

