




CITEL

UL TYPE 1 SPD - I_{max} 50kA - I_n 20kA - AC Panel Mount

M50-120S-A



- Hybrid MOV-GSG Technology
- UL1449 Type 1 LISTED
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator and audible alarm
- NEMA 6 (exceeds NEMA 4X or 4)
- 10-Year warranty

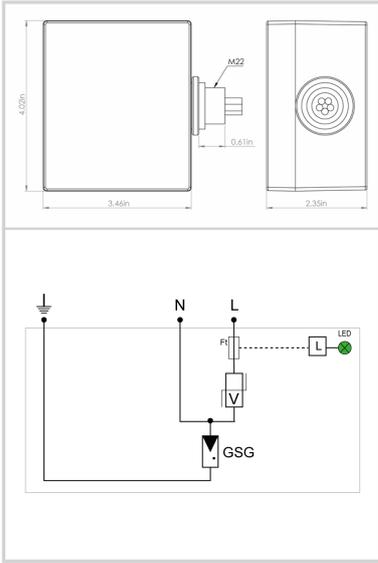

Características eléctricas		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
TENSION	(V)	120
AC/DC/DC PV/RF		AC
FASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+80
MODOS		L-N, L-G, N-G
VPR	(V)	700/1200/1200
MCOV	(V)	140/140/120
IN	(kA)	20
I _{cc} <i>cortocircuito</i>	(kA)	150
IMAX	(kA)	50
Instalación		
Housing/Enclosure material		Aluminum cast
Mounting		Side mount
IP Environmental rating		IP66
NEMA Environmental rating		NEMA 6
Installation Location		Indoor / outdoor
Accesorio		Soportes
Características mecánicas		
TECNOLOGIA		MOV-GSG
CONFIGURACION DE RED		1PH, 2W+G, Single
FORMA DE CONEXION		36" #12 AWG LEADS
MONTAJE		SIDE MOUNT, THREADED M22 (1/2" NPT ADAPTER)
MATERIAL		Aluminum cast
NEMA RATING (IP RATING)		6 (IP66)
DESCONEXION SEGURA		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		LED and audible alarm
DIMENSIONS		See diagram
WEIGHT		2.5 lbs.
Normas		
Normas ambientales		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Código		
751103		

