


M50-230S-A



- ↳ Hybrid MOV-GSG Technology
- ↳ UL1449 Type 1 LISTED
- ↳ 50kA Surge Current Rating per mode
- ↳ Extended life with no leakage current
- ↳ Visual LED fault indicator and audible alarm
- ↳ NEMA 6 (exceeds NEMA 4X or 4)
- ↳ Optional Type 2 LISTED with UL1283 Filter
- ↳ 10-Year warranty

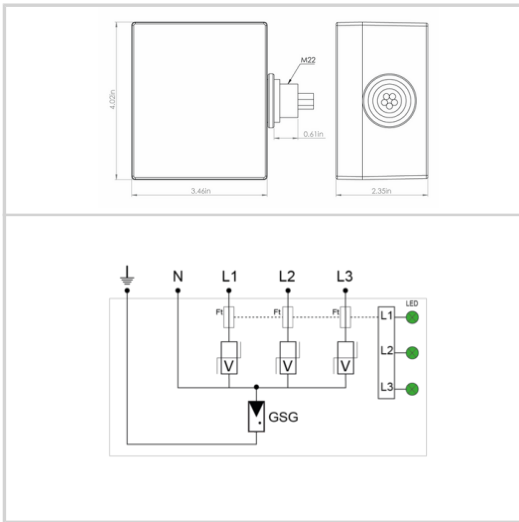

| Características eléctricas    |      |   |
|-------------------------------|------|---|
| POWER SPD TYPE                |      | UL1449 TYPE 1 LISTED                              |
| TENSION                       | (V)  | 230   |
| AC/DC/DC PV/RF                |      | AC  |
| FASE                          | (PH) | 1   |
| AMPS                          | (A)  | N/A   |
| AMBIENT MIN                   | (C)  | -35   |
| AMBIENT MAX                   | (C)  | +80   |
| MODOS                         |      | L-L, L-G, L-N                                     |
| VPR                           | (V)  | 1200/1500/1200                                    |
| MCOV                          | (V)  | 280/280/240                                       |
| IN                            | (kA) | 20  |
| I <sub>cc cortocircuito</sub> | (kA) | 150   |
| IMAX                          | (kA) | 50  |
| Características mecánicas     |      |   |
| Peso                          |      | 1.34 kg   |
| TECNOLOGIA                    |      | MOV-GSG   |
| CONFIGURACION DE RED          |      | 1PH, 2W+G, Single                                 |
| FORMA DE CONEXION             |      | 36" #12 AWG LEADS                                 |
| MONTAJE                       |      | SIDE MOUNT, THREADED M22 (1/2" NPT ADAPTER)       |
| MATERIAL                      |      | Aluminum cast                                     |
| NEMA RATING (IP RATING)       |      | 6 (IP66)  |
| DESCONEXION SEGURA            |      | Yes, no upstream over current protection required |
| REAL-TIME DIAGNOSTICS         |      | LED and audible alarm                             |
| DIMENSIONS                    |      | See diagram                                       |
| WEIGHT                        |      | 2.5 lbs.  |
| Normas                        |      |   |
| UL STANDARD                   |      | UL1449 5th Edition                                |
| UL CATEGORY                   |      | VZCA  |
| UL FILE NUMBER                |      | E326289   |
| NORMAS                        |      | NOM-003-SCFI-2014, NOM-001-SCFI-1993              |
| ENVIRONMENTAL STANDARDS       |      | ROHS  |
| Código                        |      |   |
| 751303                        |      |   |