




CITEL

UL TYPE 1 SPD - I_{max} 50kA - I_n 20kA - AC Panel Mount

M50-347Y-A



- Hybrid MOV-GSG Technology
- UL1449 Type 1 LISTED
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator and audible alarm
- NEMA 6 (exceeds NEMA 4X or 4)
- 10-Year warranty

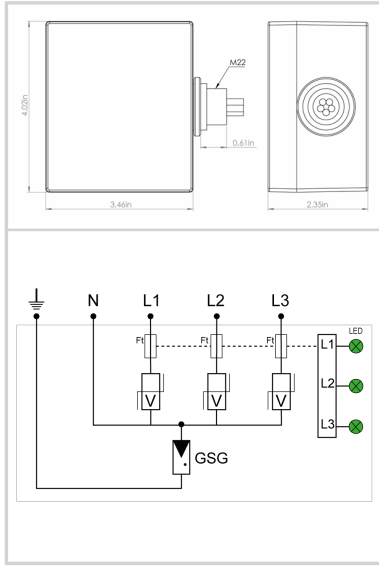

Características eléctricas	
POWER SPD TYPE	UL1449 TYPE 1 LISTED
TENSION	(V) 347/600
AC/DC/DC PV/RF	AC
FASE	(PH) 3Y
AMPS	(A) N/A
AMBIENT MIN	(C) -35
AMBIENT MAX	(C) +80
MODOS	L-L, L-N, L-G, N-G
VPR	(V) 3000/1500/1800/1500
MCOV	(V) 690/400/690/350
IN	(kA) 20
I _{cc} cortocircuito	(kA) 200
IMAX	(kA) 50
Características mecánicas	
TECNOLOGIA	MOV-GSG
CONFIGURACION DE RED	3PH, 4W+G, Wye
FORMA DE CONEXION	36" #12 AWG LEADS
MONTAJE	SIDE MOUNT, THREADED M22 (1/2" NPT ADAPTER)
MATERIAL	Aluminum cast
NEMA RATING (IP RATING)	6 (IP66)
DESCONEXION SEGURA	Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS	LED and audible alarm
DIMENSIONS	See diagram
WEIGHT	2.5 lbs.
Normas	
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS
Código	
751601	

