




CITEL

UL TYPE 1 SPD - I_{max} 50kA - I_n 20kA - AC Panel Mount

M50-480D-A



- Hybrid MOV-GSG Technology
- UL1449 Type 1 LISTED
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator and audible alarm
- NEMA 6 (exceeds NEMA 4X or 4)
- 10-Year warranty

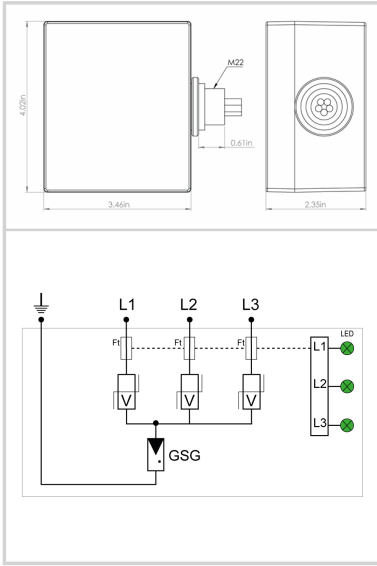

Características eléctricas	
POWER SPD TYPE	UL1449 TYPE 1 LISTED
TENSION	(V) 480
AC/DC/DC PV/RF	AC
FASE	(PH) 3D
AMPS	(A) N/A
AMBIENT MIN	(C) -40
AMBIENT MAX	(C) +80
MODOS	L-L, L-G
VPR	(V) 2500/-/1500/-
MCOV	(V) 560/560/-/-
IN	(kA) 20
I _{cc} cortocircuito	(kA) 150
IMAX	(kA) 50
Características mecánicas	
TECNOLOGIA	MOV-GSG
CONFIGURACION DE RED	3PH, 3W+G, Delta
FORMA DE CONEXION	36" #12 AWG LEADS
MONTAJE	SIDE MOUNT, THREADED M22 (1/2" NPT ADAPTER)
MATERIAL	Aluminum cast
NEMA RATING (IP RATING)	6 (IP66)
DESCONEXION SEGURA	Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS	LED and audible alarm
DIMENSIONS	See diagram
WEIGHT	2.5 lbs.
Normas	
Normas ambientales	EU RoHS
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
Código	
751704	

