




# CITEL

## UL TYPE 1 SPD - I<sub>max</sub> 75kA - I<sub>n</sub> 20/30kA - Modular Assembly

### DS72US-230S



- ✦ Multi-MOV Technology
- ✦ UL1449 Type 1 LISTED
- ✦ 75kA Surge Current Rating per module
- ✦ Visual fault indicator and remote contacts
- ✦ Replaceable Modules
- ✦ 10-Year warranty

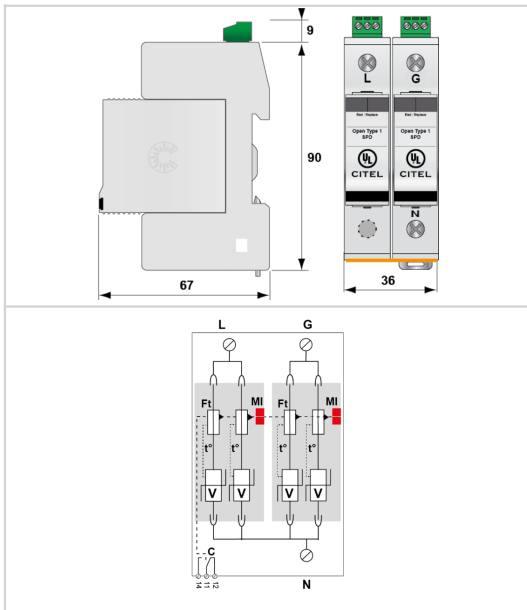

Características eléctricas	
POWER SPD TYPE	UL1449 TYPE 1 LISTED
TENSION	(V) 230
AC/DC/DC PV/RF	AC
FASE	(PH) 1
AMPS	(A) N/A
AMBIENT MIN	(C) -40
AMBIENT MAX	(C) +85
MODOS	L-L, L-G, L-N, N-G
VPR	(V) 1000/1800/900
MCOV	(V) 320/595/275
IN	(kA) 20
I <sub>cc</sub> cortocircuito	(kA) 200
IMAX	(kA) 75
RELATIVE HUMIDITY	(%) 95%
Características mecánicas	
TECNOLOGIA	Multi-MOV
CONFIGURACION DE RED	2 pole, 2W+G, Single/Spilt Phase
FORMA DE CONEXION	Screw Terminal, 13-2AWG Solid Wire, 13-4AWG Stranded Wire
MONTAJE	Din Rail
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DESCONEXION SEGURA	Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts
DIMENSIONS	See diagram
WEIGHT	0.60 lbs
Normas	
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS
Código	
32194255	

