






# CITEL



## DSDT16

- › "V" Connection screw terminal for SPD
- › Improved connection for better efficiency
- › Avoids voltage drop in parallel connections
- › 40A Max. load current rated
- › Insulation Temp. 90C rated
- › UL Recognized

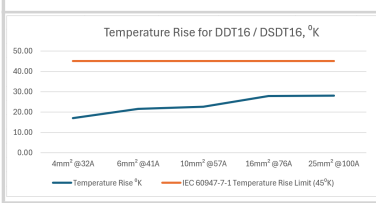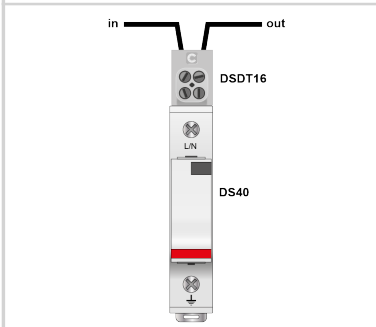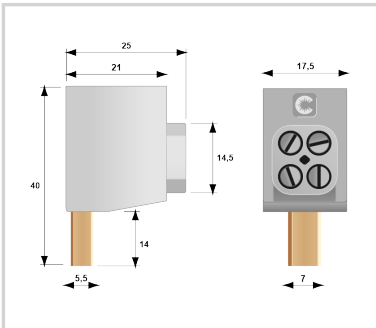

Electrical Characteristics		
Max. DC operating voltage	Uc	1500 Vdc
Connection mode(s)		"V" Connection
Max. Load current	IL	300V/40 A
Mechanical Characteristics		
Mounting		On DS range terminal
Ingress Protection rating		IP00
Contacts		Brass
Standards		
UL File Number		E533374
Certification		UL Recognized
UL STANDARD		UL486A-486B
Part number		
400102		

