




- 1 Pair Protection
- Modes of Protection L-L,L-G
- Conduit Mounting-1/2 inch NPT
- Direct Transducer Mount
- Parallel or Series Connection Options

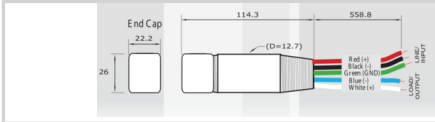

Electrical Characteristics			
VOLTS	(V)		24
MAXIMUM LINE VOLTAGE	(V)		32
WIRES			4W+GROUND
LINE CURRENT MAX	(A)		0.3
AMBIENT MIN	(C)		-55
AMBIENT MAX	(C)		+85
PROTECTION LEVEL	(V)		38
IN	(kA)		10
			15 impulses 8/20µs
IMAX	(kA)		15
			8/20µs
Installation			
Operating Relative Humidity $_{Max}$	%RH		Can be submerged
Operating Altitude $_{Min}$	Ft		2000.0000
Operating Altitude $_{Max}$	Ft		6500.0000
Housing/Enclosure material			Stainless Steel
Mounting			Conduit-1/2" NPT
Installation Location			Indoor / outdoor
Product Dimension L	mm		114.3000
Product Dimension H	mm		26.0000
Product Dimension W	mm		27.9400
Product Dimension L	In		4.5000
Product Dimension H	In		1.0000
Product Dimension W	In		1.1000
Product Weight	lbs		0.8000
Miscellaneous			
Individual Pack			Yes
Mechanical Characteristics			
CONNECTION METHOD			Parallel- #16 AWG Copper Wires-Tinned
Part number			
6336			