




CITEL



TSP15M-P-24D3

- › 1 Pair Protection
- › Modes of Protection L-L,L-G
- › Conduit Mounting-1/2 inch NPT
- › Direct Transducer Mount
- › Parallel or Series Connection Options

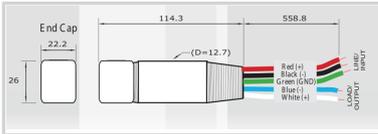

Electrical Characteristics

VOLTS	(V)	24
MAXIMUM LINE VOLTAGE	(V)	32
WIRES		4W+GROUND
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-55
AMBIENT MAX	(C)	+85
PROTECTION LEVEL	(V)	38
IN	(kA)	10
15 impulses 8/20µs		
IMAX	(kA)	15
8/20µs		

Installation

Operating Relative HumidityMax	%RH	Can be submerged
Operating AltitudeMin	Ft	2000.0000
Operating AltitudeMax	Ft	6500.0000
Housing/Enclosure material		Stainless Steel
Mounting		Conduit-1/2" NPT
Installation Location		Indoor / outdoor
Product DimensionL	mm	114.3000
Product DimensionH	mm	26.0000
Product DimensionW	mm	27.9400
Product DimensionL	In	4.5000
Product DimensionH	In	1.0000
Product DimensionW	In	1.1000
Product Weight	lbs	0.8000

Miscellaneous

Individual Pack		Yes
-----------------	--	-----

Mechanical Characteristics

CONNECTION METHOD		Parallel- #16 AWG Copper Wires-Tinned
-------------------	--	---------------------------------------

Part number

6336		
------	--	--

