




CITEL



TSP15M-P-24D3

- › 1 Pair Protection
- › Modes of Protection L-L,L-G
- › Conduit Mounting-1/2 inch NPT
- › Direct Transducer Mount
- › Parallel or Series Connection Options

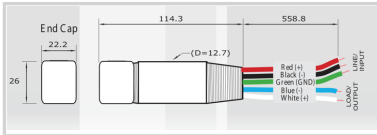

Características eléctricas

TENSION	(V)	24
MAXIMUM LINE VOLTAGE	(V)	32
WIRES		4W+GROUND
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-55
AMBIENT MAX	(C)	+85
PROTECTION LEVEL	(V)	38
IN	(kA)	10
IMAX	(kA)	15

Instalación

Operating Relative Humidity	%RH	Can be submerged
Operating Altitude	Ft	2000.0000
Operating Altitude	Ft	6500.0000
Housing/Enclosure material		Stainless Steel
Mounting		Conduit-1/2" NPT
Installation Location		Indoor / outdoor
Product Dimension	mm	114.3000
Product Dimension	mm	26.0000
Product Dimension	mm	27.9400
Product Dimension	In	4.5000
Product Dimension	In	1.0000
Product Dimension	In	1.1000
Product Weight	lbs	0.8000

Miscelánea

Individual Pack		Yes
-----------------	--	-----

Características mecánicas

FORMA DE CONEXION		Parallel- #16 AWG Copper Wires-Tinned
-------------------	--	---------------------------------------

Código

6336		
-------------	--	--

