




CITEL



DS50PV-600



?

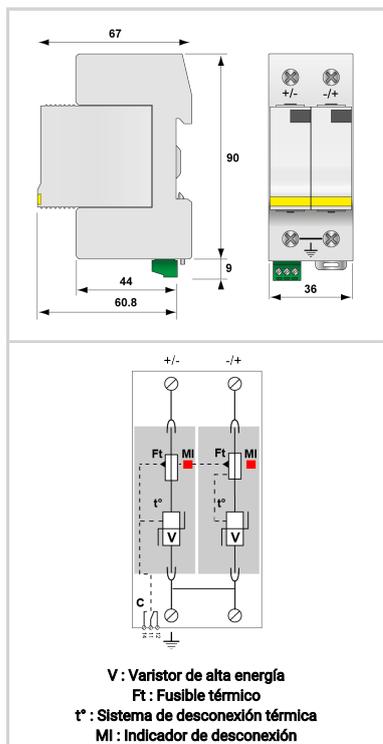

Características eléctricas		
Corriente de descarga máxima	Imax	40 kA
Capacidad máx. En onda 8/20µs por polo		
Modo(s) de protección		Modo común
Nivel de protección +/-PE (-/PE) @ In (8/20µs)	Up	2.5 kV
Maximum Discharge Current	kA	40.0000
Maximum Discharge Current	kA	40.0000
Maximum Discharge Current	kA	40.0000
Voltage Protection Level	V	4000.0000
Opción		
RFI Filter		no
Instalación		
Wiring type		Screw
Solid wire cross section	mm ²	2.5000
Solid Wire cross section	mm ²	35.0000
Stranded Wire cross section	mm ²	2.5000
Stranded wire cross section	mm ²	25.0000
Wire gauge	AWG	13.0000
Wire gauge	AWG	4.0000
Torque	Nm	2.0 - 2.5
Torque	in-lbs	17.8 - 22.1
Strip Length	mm	13.0000
Strip Length	in	0.5000
Operating Temperature	°C	-40.0000
Operating Temperature	°C	85.0000
Operating Temperature	°F	-40.0000
Operating Temperature	°F	85.0000
Operating Relative Humidity	%RH	95
Operating Altitude	Ft	2000.0000
Operating Altitude	Ft	6500.0000
Housing/Enclosure material		Thermoplastic
Flammability rating		V0
Mounting		Din Rail
IP Environmental rating		IP20
NEMA Environmental rating		NEMA 1
Installation Location		Indoor
Spare part		Module
Product Dimension	mm	99.0000
Product Dimension	mm	67.0000
Product Dimension	mm	36.0000
Product Dimension	In	3.8900
Product Dimension	In	2.6400
Product Dimension	In	1.4200
Miscelánea		
Individual Pack		Yes
Storage Temperature	°C	-40.0000
Storage Temperature	°C	85.0000
Storage Temperature	°F	-40.0000
Storage Temperature	°F	85.0000
Storage Relative Humidity	%RH	95.0000
Características mecánicas		



CITEL

DS50PV-600

Conexión a la red		Por terminales : 4-25 mm ² / por bus
Montaje		Carril DIN simétrico 35 mm (EN 60715)
Temperatura de operación	Tu	-40/+85°C
Clase de protección		IP20
Normas		
Certificación		UL
Código		
480401		

