




CITEL

DS60VGPV-1000



- UL Type 1 CA DC SPD for PV Systems
- VG Technology for Maximum Performance
- Zero Leakage Current
- Zero Current Working
- I_{max} : 40kA/pole at 8/20μs
- I_n : IEC 20kA/pole, UL 10kA/pole at 8/20μs
- UL 1449 4th Edition Recognized

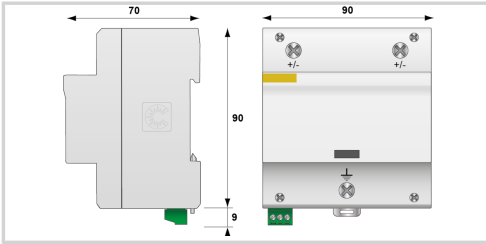

Características eléctricas		
Nivel de protección +/-PE (-/PE) @ In (8/20μs)	Up	2.8 kV
Voltage Protection Level	V	4000.0000
Voltage Protection Level	V	3000.0000
Voltage Protection Level	V	3000.0000
Características mecánicas		
Tecnología	Tecnología VG (MOV+GSG)	
Conexión a la red	Por terminales de tornillos 4-25 mm ²	
Normas		
Certificación	UL	
Código		
3947		

