




# CITEL

## DS60VGPV-1000



- UL Type 1 CA DC SPD for PV Systems
- VG Technology for Maximum Performance
- Zero Leakage Current
- Zero Current Working
- I<sub>max</sub> : 40kA/pole at 8/20μs
- I<sub>n</sub> : IEC 20kA/pole, UL 10kA/pole at 8/20μs
- UL 1449 4th Edition Recognized

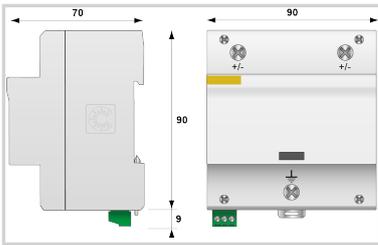

### Características eléctricas

Corriente de descarga máxima <i>Capacidad máx. En onda 8/20μs por polo</i>	I <sub>max</sub>	40 kA
Nivel de protección +/-PE (-/PE) <i>@ In (8/20μs)</i>	U <sub>p</sub>	2.8 kV
Voltage Protection Level	V	4000.0000
Voltage Protection Level	V	3000.0000
Voltage Protection Level	V	3000.0000

### Características mecánicas

Tecnología		Tecnología VG (MOV+GSG)
Conexión a la red		Por terminales de tornillos 4-25 mm <sup>2</sup>
Temperatura de operación	T <sub>u</sub>	-40/+85°C
Clase de protección		IP20

### Normas

Certificación		UL
---------------	--	----

### Código

<b>3947</b>
-------------

