




CITEL

DS60VGPV-1000



- UL Type 1 CA DC SPD for PV Systems
- VG Technology for Maximum Performance
- Zero Leakage Current
- Zero Current Working
- I_{max} : 40kA/pole at 8/20μs
- I_n : IEC 20kA/pole, UL 10kA/pole at 8/20μs
- UL 1449 4th Edition Recognized

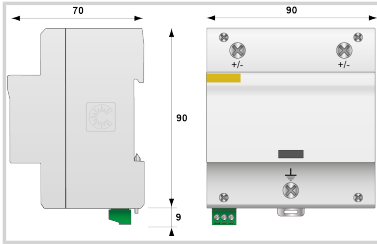

Características eléctricas

Corriente de descarga máxima <i>Capacidad máx. En onda 8/20μs por polo</i>	I _{max}	40 kA
Nivel de protección +/-PE (-/PE) <i>@ I_n (8/20μs)</i>	U _p	2.8 kV
Voltage Protection Level	V	4000.0000
Voltage Protection Level	V	3000.0000
Voltage Protection Level	V	3000.0000

Características mecánicas

Tecnología		Tecnología VG (MOV+GSG)
Conexión a la red		Por terminales de tornillos 4-25 mm ²
Montaje		Carril DIN simetrico 35 mm (EN 60715)
Temperatura de operación	T _u	-40/+85°C
Clase de protección		IP20

Normas

Certificación		UL
---------------	--	----

Código

3947

