




UL TYPE 1 SPD - I_{max} 75kA - In 20/30kA - Modular Assembly

CITEL

DS72US-240T/NN



- Multi-MOV Technology
- UL1449 Type 1 LISTED
- 75kA Surge Current Rating per module
- Visual fault indicator and remote contacts
- Replaceable Modules
- 10-Year warranty

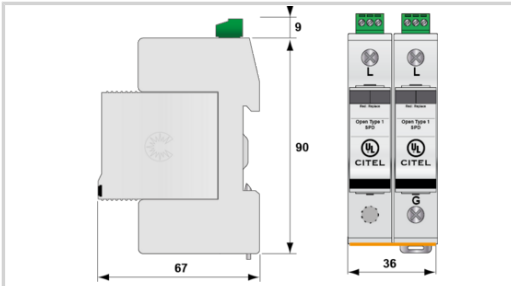

Características eléctricas	
POWER SPD TYPE	UL1449 TYPE 1 LISTED
TENSION	(V) 480/240
AC/DC/DC PV/RF	AC
FASE	(PH) 1S
AMPS	(A) N/A
AMBIENT MIN	(C) -40
AMBIENT MAX	(C) +85
MODOS	L-L, L-G
VPR	(V) 2500/-/1500/-
MCOV	(V) 840/-/420/-
IN	(kA) 20
I _{cc cortocircuito}	(kA) 200
IMAX	(kA) 75
RELATIVE HUMIDITY	(%) 95%
Características mecánicas	
Peso	0,296 kg
TECNOLOGIA	Multi-MOV
CONFIGURACION DE RED	2PH, 2W+G, Split Phase
FORMA DE CONEXION	Screw Terminal, 13-2AWG Solid Wire, 13-4AWG Stranded Wire
MONTAJE	Din Rail
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DESCONEXION SEGURA	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts
DIMENSIONS	See diagram
WEIGHT	0.65 lbs
Normas	
Certificación	UL Listed / TUV
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS
Código	
32195255	

