




CITEL

DS73US-240T/G



- Hybrid Technology (Multi-MOV+GSG)
- UL1449 Type 1 LISTED
- 75kA Surge Current Rating per module
- Visual fault indicator and remote contacts
- 10-Year warranty

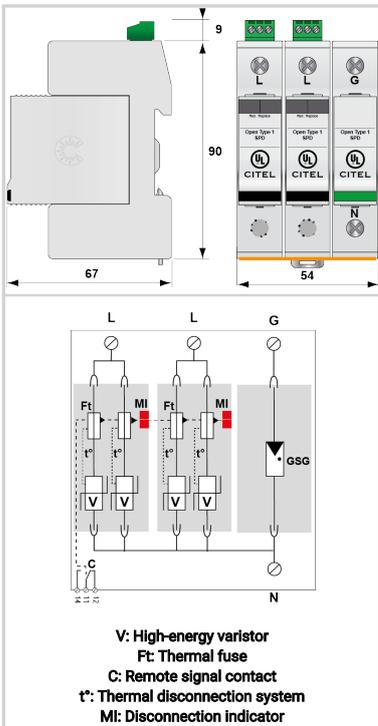

| Electrical Characteristics | | |
|---------------------------------|------|--|
| Voltage Protection Level VPR | V | 1500.0000 |
| POWER SPD TYPE | | UL1449 TYPE 1 LISTED |
| AC/DC/DC PV/RF | | AC |
| PHASE | (PH) | 1S |
| AMPS | (A) | N/A |
| AMBIENT MIN | (C) | -40 |
| AMBIENT MAX | (C) | +85 |
| MODES | | L-L, L-N, L-G, N-G |
| MCOV | (V) | 840/420/420/255 |
| IN 15 impulses 8/20μs | (kA) | 20 |
| SCCR | (kA) | 200 |
| IMAX 8/20μs | (kA) | 75 |
| RELATIVE HUMIDITY | (%) | 95% |
| Mechanical Characteristics | | |
| TECHNOLOGY | | Multi-MOV+GSG |
| NETWORK CONFIGURATION | | 1PH, 3W+G, Split Phase |
| CONNECTION METHOD | | SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG |
| MOUNTING | | Din Rail |
| MATERIAL | | Thermoplastic UL94-V0 |
| NEMA RATING (IP RATING) | | NEMA 2 (IP20) |
| FAIL-SAFE BEHAVIOR | | Disconnection via fuse-link |
| REAL-TIME DIAGNOSTICS | | Visual indicator and remote contacts |
| DIMENSIONS | | See diagram |
| Standards | | |
| UL STANDARD | | UL1449 5th Edition |
| UL CATEGORY | | VZCA, VZCA7 |
| UL FILE NUMBER | | E326289 |
| STANDARDS | | IEC61643-11/EN61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ENVIRONMENTAL STANDARDS | | ROHS |
| Part number | | |
| 32196355 | | |

