




- ✦ Multi-TMOV Technology
- ✦ UL1449 Type 1 LISTED
- ✦ 105-220kA Surge Current Rating
- ✦ Surge counter
- ✦ Visual fault indicator, audible alarm and remote contacts
- ✦ 10-Year warranty

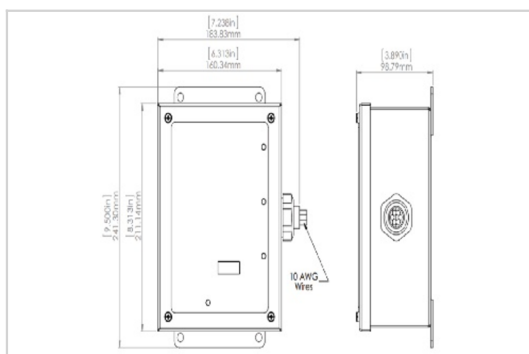

Características eléctricas	
POWER SPD TYPE	UL1449 TYPE 1 LISTED
TENSION (V)	480
AC/DC/DC PV/RF	AC
FASE (PH)	3D
AMPS (A)	N/A
AMBIENT MIN (C)	-35
AMBIENT MAX (C)	+85
MODOS	L-L, L-G
VPR (V)	3000/-/1800/-
MCOV (V)	1100/-/550/-
IN (kA)	20
IMAX (kA)	220
Opción	
RFI Filter	no
Surge Counter	INCLUDED
Características mecánicas	
TECNOLOGIA	Multi-TMOV
CONFIGURACION DE RED	3PH, 3W+G, Delta
FORMA DE CONEXION	36" #10 AWG LEADS
MONTAJE	FLANGE MOUNT
MATERIAL	Steel
NEMA RATING (IP RATING)	IP65
DESCONEXION SEGURA	Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS	% of protection present LED, audible alarm and remote contacts. Optional surge counter.
DIMENSIONS	See diagram
WEIGHT	6 lbs
Normas	
Certificación	UL Listed
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
NORMAS	UL96A, ANSI C62.41/45, NOM-003-SCFI-2014, NOM-001-SCFI-1993, IEC61643-11
ENVIRONMENTAL STANDARDS	ROHS
Código	
89013403	