





# CITEL



## UL TYPE 1 SPD - I<sub>max</sub> 40kA - I<sub>n</sub> 20kA - Modular

### DS44US-480D

- ▶ MOV Technology
- ▶ UL1449 Type 1
- ▶ 40kA Surge Current Rating
- ▶ Visual fault indicator and remote contacts
- ▶ 10-Year warranty

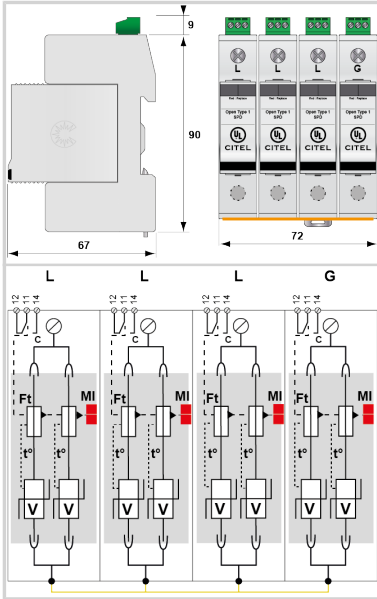

Características eléctricas	
POWER SPD TYPE	UL1449 TYPE 1 LISTED
TENSION (V)	480
AC/DC/DC PV/RF	AC
FASE (PH)	3D
AMPS (A)	N/A
AMBIENT MIN (C)	-35
AMBIENT MAX (C)	+60
MODOS	L-L, L-G
VPR (V)	1800/-/1800/-
MCOV (V)	550/-/550/-
IN (kA)	20
I <sub>cc</sub> cortocircuito (kA)	100
IMAX (kA)	40
I <sub>imp</sub> (kA)	4
Características mecánicas	
Modo de fallo	Desconexión de la red Baja Tensión
TECNOLOGIA	MOV
CONFIGURACION DE RED	3PH, 3W+G, Delta
FORMA DE CONEXION	SPD-Screw Terminal (8-12AWG), Terminal blocks 6AWG
MONTAJE	Din Rail
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DESCONEXION SEGURA	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	Visual indicator and remote contacts
DIMENSIONS	See diagram
WEIGHT	1.20 lbs
SPARE PART	DSM40U-275
Normas	
Certificación	CSA / UL Listed
Normas ambientales	EU RoHS
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
Código	
33171455	

