




# CITEL

## UL TYPE 1 SPD - I<sub>max</sub> 75kA - I<sub>n</sub> 20/30kA - Modular Assembly

### DS73US-240Y/NN



- ▶ Multi-MOV Technology
- ▶ UL1449 Type 1 LISTED
- ▶ 75kA Surge Current Rating per module
- ▶ Visual fault indicator and remote contacts
- ▶ Replaceable Modules
- ▶ 10-Year warranty

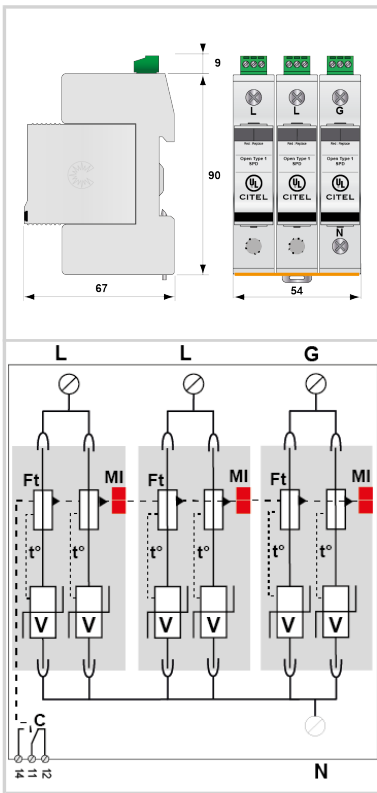

#### Características eléctricas

POWER SPD TYPE		UL1449 TYPE 1 LISTED
TENSION	(V)	240/415
AC/DC/DC PV/RF		AC
FASE	(PH)	3Y
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+85
MODOS		L-L, L-G
VPR	(V)	1800/1000
MCOV	(V)	640/320
I <sub>N</sub>	(kA)	20
I <sub>cc</sub> <i>cortocircuito</i>	(kA)	200
I <sub>MAX</sub>	(kA)	75
RELATIVE HUMIDITY	(%)	95%

#### Características mecánicas

TECNOLOGIA		Multi-MOV
CONFIGURACION DE RED		3PH, 3W+G, No Neutral
FORMA DE CONEXION		Screw Terminal (4-14AWG)
MONTAJE		Wall mount
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DESCONEXION SEGURA		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram

#### Normas

Certificación		UL Listed
Normas ambientales		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993

#### Código

32191355

