



CITEL




Outdoor Category 6 POE Surge Protective Device

CRMJ8-POE-C6/KF



POE++ compatible

- ▶ Shielded enclosure and connectors
- ▶ 16 kA maximum surge discharge capability
- ▶ Up to 10Gbps
- ▶ UL497B

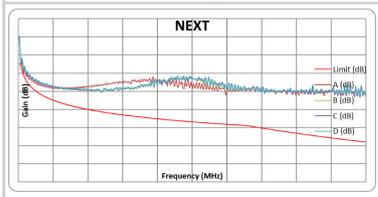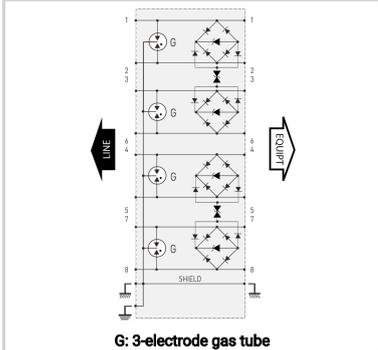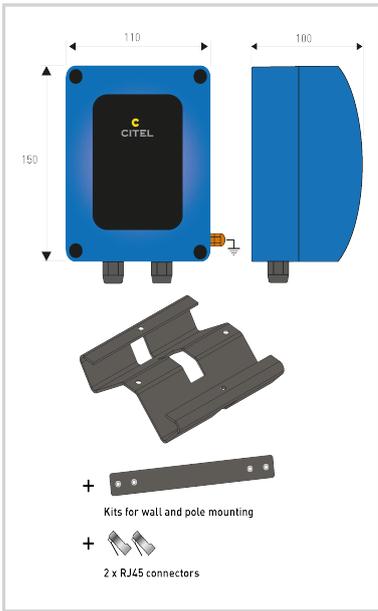

Electrical Characteristics

Network		10Gb/s on Cat6A S/FTP cabling
Protection modes (network)		CM / DM
Protection modes (POE)		CM / DM (common mode / differential mode)
Transmission standard		IEEE 802.3bt
Lightning Protection Zones (LPZ)		0 - 3
Max. DC operating voltage	Uc	8 Vdc
Max. operating voltage (POE)	Uc	60 Vdc
Max. frequency	f max.	500 MHz
Max. data rate		10 Gbps
Max. load current @25°C	IL	2 A
Max. POE power (4PPOE)		90 W
Nominal discharge current C1 (1.2/50us / 8/20us), 300 applications X-X (Line/Line)	In	1kV / 500A
Nominal discharge current C1 (1.2/50us / 8/20us), 300 applications, X-C (Pair-Pair, POE)	In	200 V / 100 A
Nominal discharge current C2 (1.2/50us / 8/20us), 10 applications X-C (Line/Earth)	In	4 kV / 2 kA
Max. discharge current max. withstand @ 8/20 μs, X-C (Line/Earth)	Imax	2 kA
Max. discharge current max. withstand @ 8/20 μs, 8X-C (1&2+3&4&5+7&8 to Earth)	Imax Total	16 kA
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)	Up	< 20 V
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-C (Line/Earth)	Up	< 700 V
Protection Level C3 (10/1000μs), 300 applications @ 10A, (Pair-Pair, POE)	Up	< 70 V
Impulse current D1 (10/350μs), 2 applications, X-C (Line/Earth)	Iimp	500 A
Line resistance (± 10%)		~ 0 ohms
Capacitance @1MHz, X-C (Line/Earth)	C	< 5 pF
DATA SPD TYPE		UL497B LISTED
VOLTS	(V)	48
AC/DC/DC PV/RF		DC
WIRES		8W+Shield+Ground
LINE CURRENT MAX	(A)	1.2
POWER RATING	(W)	100
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+85
MODES		DC+DC,DC+G,DC-G,SH-G
RESIDUAL VOLTAGE	(V)	70
MCOV	(V)	60/72/72
IMAX 8/20μs	(kA)	16
DATA SPEED	(Mbps)	10/100/1000

Mechanical Characteristics

Technology		GDT+TVS diode
Connection to Network		RJ45 shielded connectors Female input/output
Cable glands		Plastic/Rubber
Format		Metallic Enclosure with connectors input/output
Mounting		Wall / Pole
Accessory(s) provided		Pole bracket, wall bracket, screw, washer, RJ45 (2)
Operating temperature	Tu	-40/+85°C
Ingress Protection rating		IP66 (NEMA 4/4X)



CITEL

Outdoor Category 6 POE Surge Protective Device

CRMJ8-POE-C6/KF

Failsafe mode	Transmission cut-off - Fault mode 2 (short-circuit)
Pinout	(1-2)(3-6)(4-5)(7-8)
TECHNOLOGY	SAD-GDT
NETWORK CONFIGURATION	Single POE Line
CONNECTION METHOD	Shielded RJ45
MOUNTING	FLANGE MOUNT/POLE MOUNT KIT
MATERIAL	Polycarbonate
FLAMMABILITY RATING	UL94-V0
NEMA RATING (IP RATING)	6 (IP66)
DIMENSIONS	See diagram
Standards	
UL File Number	E184939
Certification	UL 497B
Environmental standards	EU RoHS
UL STANDARD	UL497B
UL CATEGORY	QVGQ
UL FILE NUMBER	E184939
STANDARDS	NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number	
581536	

