




CITEL



TSP15M-S-24D3

- › 1 Pair Protection
- › Modes of Protection L-L,L-G
- › Conduit Mounting-1/2 inch NPT
- › Direct Transducer Mount
- › Parallel or Series Connection Options

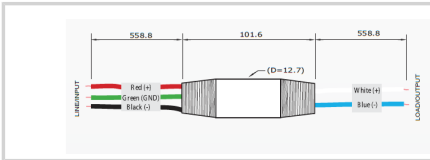

Electrical Characteristics			
VOLTS	(V)		24
MAXIMUM LINE VOLTAGE	(V)		32
WIRES			4W+GROUND
LINE CURRENT MAX	(A)		0.3
AMBIENT MIN	(C)		-55
AMBIENT MAX	(C)		+85
PROTECTION LEVEL	(V)		38
IN	(kA)		10
<i>15 impulses 8/20µs</i>			
IMAX	(kA)		15
<i>8/20µs</i>			
Installation			
Operating Relative HumidityMax	%RH		Can be submerged
Operating AltitudeMin	Ft		2000.0000
Operating AltitudeMax	Ft		6500.0000
Housing/Enclosure material			Stainless Steel
Mounting			Conduit-1/2" NPT
Installation Location			Indoor / outdoor
Product DimensionL	mm		114.3000
Product DimensionH	mm		26.0000
Product DimensionW	mm		27.9400
Product DimensionL	In		4.5000
Product DimensionH	In		1.0000
Product DimensionW	In		1.1000
Product Weight	g		363.0000
Product Weight	lbs		0.8000
Miscellaneous			
Individual Pack			Yes
Mechanical Characteristics			
CONNECTION METHOD			Series- #16 AWG Copper Wires-Tinned
Part number			
6337			

