




CITEL



TSP15M-S-24D3

- › 1 Pair Protection
- › Modes of Protection L-L,L-G
- › Conduit Mounting-1/2 inch NPT
- › Direct Transducer Mount
- › Parallel or Series Connection Options

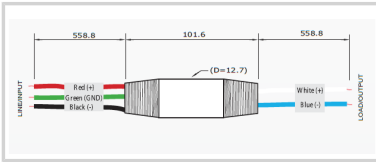

Electrical Characteristics

VOLTS	(V)	24
MAXIMUM LINE VOLTAGE	(V)	32
WIRES		4W+GROUND
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-55
AMBIENT MAX	(C)	+85
PROTECTION LEVEL	(V)	38
IN	(kA)	10
15 impulses 8/20µs		
IMAX	(kA)	15
8/20µs		

Installation

Operating Relative HumidityMax	%RH	Can be submerged
Operating AltitudeMin	Ft	2000.0000
Operating AltitudeMax	Ft	6500.0000
Housing/Enclosure material		Stainless Steel
Mounting		Conduit-1/2" NPT
Installation Location		Indoor / outdoor
Product DimensionL	mm	114.3000
Product DimensionH	mm	26.0000
Product DimensionW	mm	27.9400
Product DimensionL	In	4.5000
Product DimensionH	In	1.0000
Product DimensionW	In	1.1000
Product Weight	g	363.0000
Product Weight	lbs	0.8000

Miscellaneous

Individual Pack		Yes
-----------------	--	-----

Mechanical Characteristics

CONNECTION METHOD		Series- #16 AWG Copper Wires-Tinned
-------------------	--	-------------------------------------

Part number

6337		
------	--	--

