





CITEL



MSB10-48DC/OBSTA

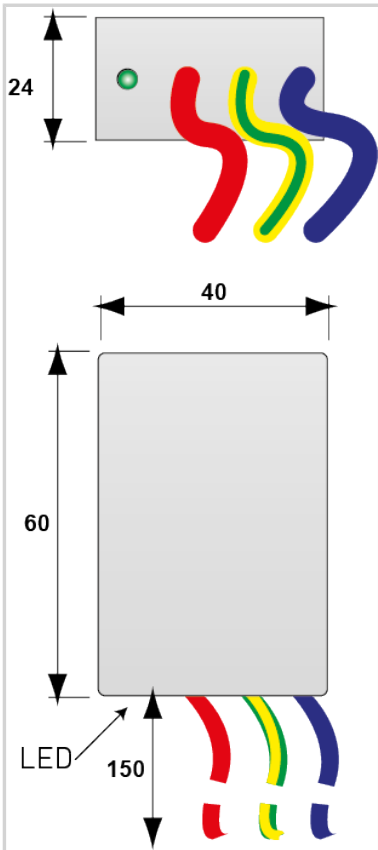

Electrical Characteristics		
Network		48 Vdc
Nominal line voltage	Un	48 V
Max. AC operating voltage	Uc	60 Vac
Max. DC operating voltage	Uc	68 Vdc
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	Imax	2 kA
Protection mode(s)		Common/Differential mode
Mechanical Characteristics		
Technology		MOV+GDT
Connection to Network		Wires
Mounting		Wall or plate
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Disconnection from AC network
Standards		
Certification		
Part number		
56200189		



V: Varistor
 GSG: Specific gas tube
 LED: Disconnection indicator
 Ft: Thermal fuse
 t*: Thermal system disconnection

