





CITEL

UL TYPE 4CA - I_{max} 22kA - I_n 10kA

MLPXU-277L-W-HE



- MOV Technology
- for 120-277Vac LED applications
- I_{max} 20kA, I_n 10kA
- LED indicator
- IP67
- ANSI/IEEE C136.2 Extreme
- ANSI/IEEE C62.41 Category C
- UL Type 4CA
- 10-year Warranty

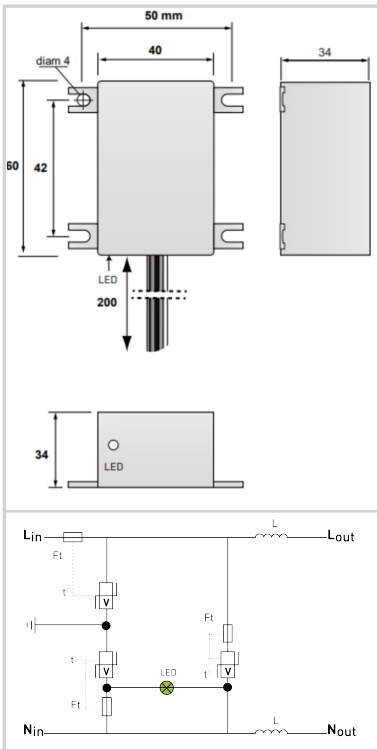

| Características eléctricas | |
|-------------------------------|--|
| POWER SPD TYPE | UL1449 5th Ed. TYPE 4CA |
| TENSION | (V) 277 |
| AC/DC/DC PV/RF | AC |
| FASE | (PH) 1 |
| AMPS | (A) 8 |
| AMBIENT MIN | (C) -40 |
| AMBIENT MAX | (C) +75 |
| MODOS | L-L, L-G, L-N, N-G |
| MLV | (V) 1280/1190/1220 |
| MCOV | (V) 320/320/320 |
| IN | (kA) 10 |
| I _{cc} cortocircuito | (kA) n/a |
| IMAX | (kA) 22 |
| Características mecánicas | |
| TECNOLOGIA | Hybrid Inductor+Thermal-MOV |
| CONFIGURACION DE RED | 2 pole, 2W+G, Single/Spilt Phase |
| FORMA DE CONEXION | 150mm/5.97" #16 AWG Lead Wires |
| MONTAJE | FLANGE MOUNT |
| MATERIAL | Thermoplastic UL94-V0 |
| NEMA RATING (IP RATING) | NEMA 6P (IP67) |
| DESCONEXION SEGURA | Disconnection via fuse-link |
| REAL-TIME DIAGNOSTICS | LED Indicator |
| DIMENSIONS | See diagram |
| WEIGHT | 0.30 lbs |
| Normas | |
| Certificación | cRUus |
| Normas ambientales | EU RoHS |
| UL STANDARD | UL1449 5th Edition |
| UL CATEGORY | VZCA2, VZCA8 |
| UL FILE NUMBER | E326289 |
| NORMAS | IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ANSI/IEEE C62.41 | Category C 20kV/10kA |
| ANSI/IEEE C136.2 | Extreme Category 20kV/10kA |
| Código | |
| 7113195 | |

