





CITEL

UL TYPE 4CA - I_{max} 22kA - I_n 10kA

MLPXU-277L-W-HE



- MOV Technology
- for 120-277Vac LED applications
- I_{max} 20kA, I_n 10kA
- LED indicator
- IP67
- ANSI/IEEE C136.2 Extreme
- ANSI/IEEE C62.41 Category C
- UL Type 4CA
- 10-year Warranty

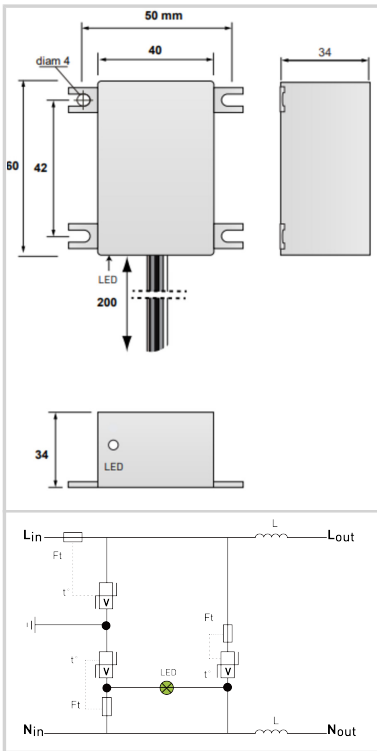

Características eléctricas	
POWER SPD TYPE	UL1449 5th Ed. TYPE 4CA
TENSION	(V) 277
AC/DC/DC PV/RF	AC
FASE	(PH) 1
AMPS	(A) 8
AMBIENT MIN	(C) -35
AMBIENT MAX	(C) +75
MODOS	L-L, L-G, L-N, N-G
MLV	(V) 1280/1190/1220
MCOV	(V) 320/320/320
IN	(kA) 10
I _{cc cortocircuito}	(kA) n/a
IMAX	(kA) 22
Características mecánicas	
TECNOLOGIA	Hybrid Inductor+Thermal-MOV
CONFIGURACION DE RED	2 pole, 2W+G, Single/Spilt Phase
FORMA DE CONEXION	150mm/5.97" #16 AWG Lead Wires
MONTAJE	FLANGE MOUNT
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 6P (IP67)
DESCONEXION SEGURA	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	LED Indicator
DIMENSIONS	See diagram
WEIGHT	0.30 lbs
Normas	
Certificación	cRUus
Normas ambientales	EU RoHS
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA2, VZCA8
UL FILE NUMBER	E326289
NORMAS	IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ANSI/IEEE C62.41	Category C 20kV/10kA
ANSI/IEEE C136.2	Extreme Category 20kV/10kA
Código	
7113195	

