




- ↳ Hybrid SAD-GDT Technology
- ↳ UL497B LISTED
- ↳ 20kA I_{max} (1x 8/20us)
- ↳ 5kA I_{mp} (2x 10/350us)
- ↳ 5kA I_n (10x 8/20us)
- ↳ Modular with Visual Fault Indicator
- ↳ Spring & Screw Terminal versions
- ↳ Circuit disconnection with Module removal
- ↳ Common/Differential Mode Protection



Electrical Characteristics	
Network	RS232 - RS485
Max. DC operating voltage	Uc 15 Vdc
Max. frequency	f max. > 3 MHz
Insertion loss	< 1 dB
Protection mode(s)	Common/Differential mode
Protection Level C3 (10/1000µs), 300 applications@10 A, X-X (Line/Line)	Up 30 V
Protection level C3 (10/1000µs), 300 applications@10 A, X-C (Line/Earth)	Up 30 V
Impulse current 2 x 10/350µs Test - D1 Category	I _{imp} 5 kA
Nominal discharge current C2 Category	I _n 5 kA
Nominal Discharge Current, X-C (Line/Earth) 8/20µs Test x 10 - C2 Category	I _n L/PE 5 kA
Line resistance (± 10%)	4.7 Ohm
DATA SPD TYPE	UL497B LISTED
VOLTS	(V) 12
WIRES	2W+Shield+G
LINE CURRENT MAX	(A) 0.3
AMBIENT MIN	(C) -50
AMBIENT MAX	(C) +85
RESIDUAL VOLTAGE	(V) 30
MCOV	(V) 15
I _N 10 impulses 8/20µs	(kA) 5
I _{MAX} 8/20µs	(kA) 20
I _{imp} 10/350µs	(kA) 5
DATA SPEED	(Mbps) 10/100
Mechanical Characteristics	
Technology	GDT+Clamping diode+PTC (thermal resistor) + Resistor
Connection to Network	By spring contact terminal
Format	Plug-in DIN box
Failsafe mode	Opening line - transmission cut-off - fault mode 2
With line cut-off in case of removal plug-in module	Yes
TECHNOLOGY	SAD-GDT
NETWORK CONFIGURATION	1 pair
CONNECTION METHOD	Spring Contact Terminal
MOUNTING	DIN RAIL
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 2 (IP20)
DIMENSIONS	See diagram
WEIGHT	0.30 lbs
SPARE PART	DLASM-12D3
Standards	
UL STANDARD	UL497B (pending)
UL CATEGORY	QVGQ
UL FILE NUMBER	E184939
STANDARDS	IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS	ROHS
Part number	
6419024	

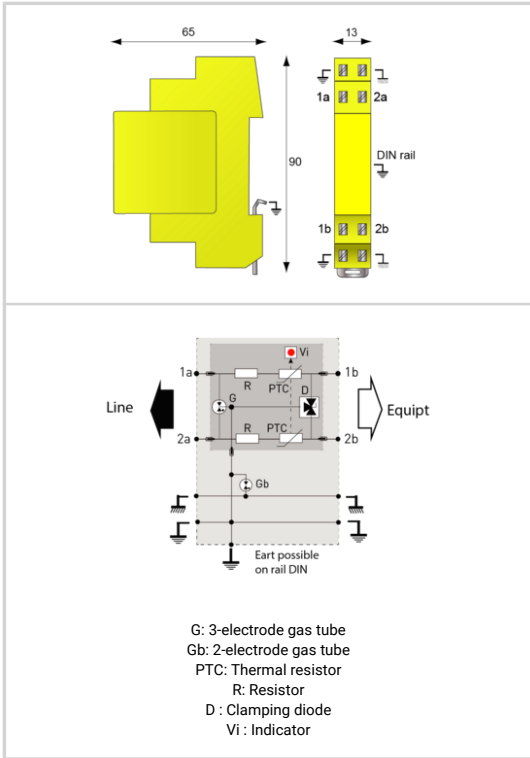