

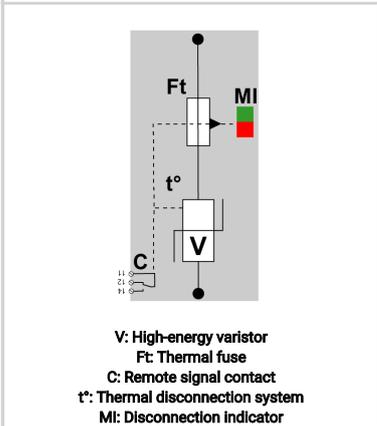


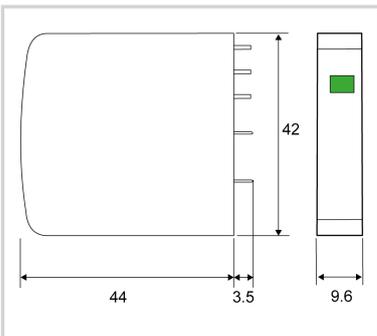

PAC25S-10-150

CITEL

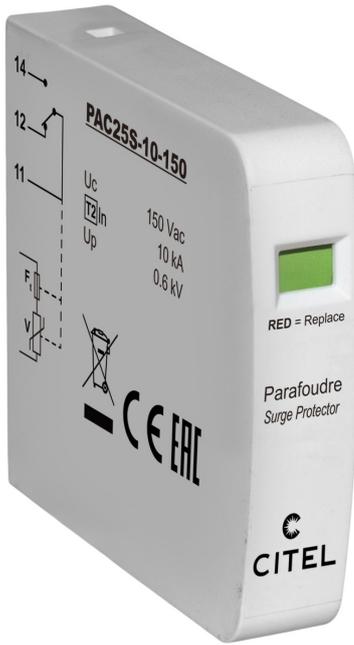

V: High-energy varistor
 Ft: Thermal fuse
 C: Remote signal contact
 t°: Thermal disconnection system
 MI: Disconnection indicator

Electrical Characteristics		
Max. AC operating voltage	Uc	150 Vac
Max. discharge current <i>max. withstand @ 8/20 μs by pole</i>	Imax	25 kA
IMAX 8/20μs	(kA)	25
Mechanical Characteristics		
Connection to Network		Through soldering pins
Mounting		On Printed Circuit Board
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Part number		
8711211		

