




CITEL

Digital Voltage Monitor and Disconnect

DVM-230-16A



- Protection against permanent/temporary overvoltages of AC network
- For 230 Vac AC single-phase powerline
- Load current: up to 16 A
- Automatic operation: disconnection/reconnection
- Operating indicator
- installation on DIN rail

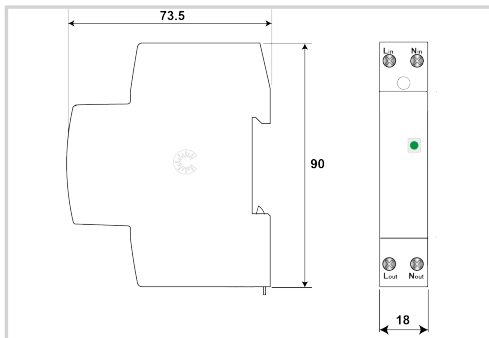

Electrical Characteristics	
Network	230 V single-phase
PROTECTS AGAINST PERMANENT AND TEMPORARY OVERVOLTAGES	YES
VOLTS	(V) 230
PHASE	(PH) 1
MAX LOAD CURRENT	A 16
Mechanical Characteristics	
Minimum disconnection during on AC voltage	3s @ 275 Vac / 1s @ 300 Vac / 0.25s @ 350 Vac / 0.07 @ 400 Vac
Connection to Network	By screw terminals: 1.5-10mm ²
Operating temperature	Tu -40/+85°C
Protection rating	IP20
CONNECTION METHOD	By screw terminals: 1.5-10mm ²
MIN DISCONNECTION TIME DURING AC OVERVOLTAGE	3s @275VAC/1s @300VAC/0.25s @350VAC/0.07s @400VAC
MOUNTING	DIN RAIL
DIMENSIONS	See diagram (mm)
Part number	
3589015	

