



### DVM-230-16A

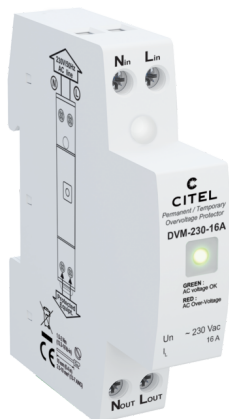

- ✦ Protection against permanent/temporary overvoltages of AC network
- ✦ For 230 Vac AC single-phase powerline
- ✦ Load current: up to 16 A
- ✦ Automatic operation: disconnection/reconnection
- ✦ Operating indicator
- ✦ installation on DIN rail

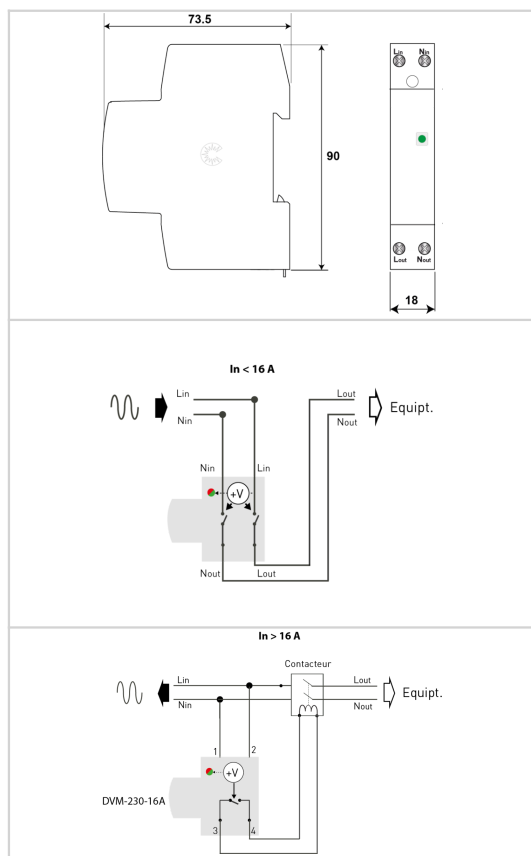

Electrical Characteristics		
Network		230 V single-phase
PROTECTS AGAINST PERMANENT AND TEMPORARY OVERVOLTAGES		YES
VOLTS	(V)	230
PHASE	(PH)	1
MAX LOAD CURRENT	A	16
Mechanical Characteristics		
Minimum disconnection during on AC voltage		3s @ 275 Vac / 1s @ 300 Vac / 0.25s @ 350 Vac / 0.07 @ 400 Vac
Connection to Network		By screw terminals: 1.5-10mm <sup>2</sup>
CONNECTION METHOD		By screw terminals: 1.5-10mm <sup>2</sup>
MIN DISCONNECTION TIME DURING AC OVERVOLTAGE		3s @275VAC/1s @300VAC/0.25s @350VAC/0.07s @400VAC
MOUNTING		DIN RAIL
DIMENSIONS		See diagram (mm)
Part number		
3589015		