




CITEL

Digital Voltage Monitor and Disconnect

DVM-230-16A



- Protection against permanent/temporary overvoltages of AC network
- For 230 Vac AC single-phase powerline
- Load current: up to 16 A
- Automatic operation: disconnection/reconnection
- Operating indicator
- installation on DIN rail

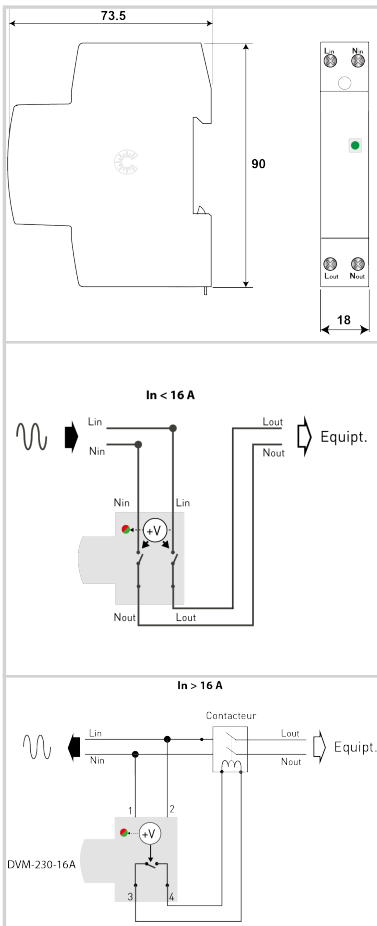

| Características eléctricas | |
|---|--|
| Red | 230 V monofásica |
| PROTECTS AGAINST PERMANENT AND TEMPORARY OVERVOLTAGES | YES |
| TENSION | (V) 230 |
| FASE | (PH) 1 |
| MAX LOAD CURRENT | A 16 |
| Características mecánicas | |
| Tiempo mínimo de desconexión de la red de AC | 3s @ 275 Vac / 1s @ 300 Vac / 0.25s @ 350 Vac / 0.07 @ 400 Vac |
| Conexión a la red | Por terminales de tornillos : 1.5-10 mm ² |
| Temperatura de operación | Tu -40/+85°C |
| Clase de protección | IP20 |
| FORMA DE CONEXION | By screw terminals: 1.5-10mm ² |
| MIN DISCONNECTION TIME DURING AC OVERVOLTAGE | 3s @275VAC/1s @300VAC/0.25s @350VAC/0.07s @400VAC |
| MONTAJE | DIN RAIL |
| DIMENSIONS | See diagram (mm) |
| Código | |
| 3589015 | |

