




CITEL

Digital Voltage Monitor and Disconnect

DVM-230-16A



- Protection against permanent/temporary overvoltages of AC network
- For 230 Vac AC single-phase powerline
- Load current: up to 16 A
- Automatic operation: disconnection/reconnection
- Operating indicator
- installation on DIN rail

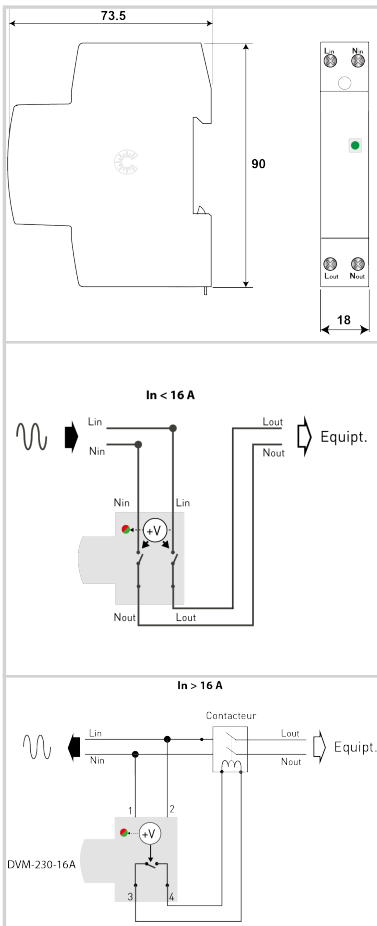

Características eléctricas	
Red	230/400 V
PROTECTS AGAINST PERMANENT AND TEMPORARY OVERVOLTAGES	YES
TENSION	(V) 230
FASE	(PH) 1
MAX LOAD CURRENT	A 16
Características mecánicas	
Tiempo mínimo de desconexión de la red de AC	3s @ 275 Vac / 1s @ 300 Vac / 0.25s @ 350 Vac / 0.07 @ 400 Vac
Conexión a la red	Por terminales de tornillos : 1.5-10 mm ²
Temperatura de operación	Tu -40/+85°C
Clase de protección	IP20
FORMA DE CONEXION	By screw terminals: 1.5-10mm ²
MIN DISCONNECTION TIME DURING AC OVERVOLTAGE	3s @275VAC/1s @300VAC/0.25s @350VAC/0.07s @400VAC
MONTAJE	DIN RAIL
DIMENSIONS	See diagram (mm)
Código	
3589015	

