




# CITEL

## UL TYPE 4CA - I<sub>max</sub> 50kA - I<sub>n</sub> 20kA - Modular

### DAC54VGUS-480DCT



- VG Technology
- UL1449 Type 4CA
- 50kA Surge Current Rating
- Visual fault indicator and remote contacts
- 10-Year warranty

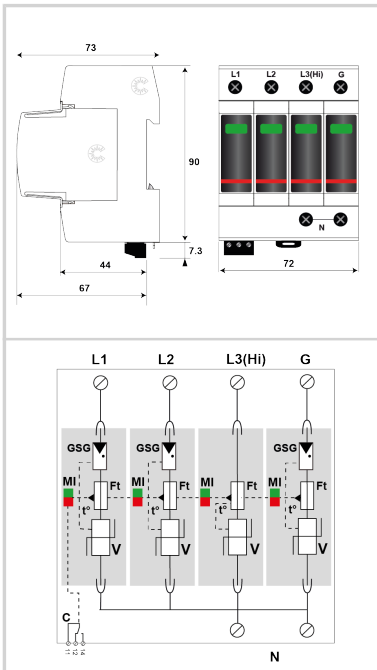

Características eléctricas		
POWER SPD TYPE		UL1449 5th Ed. TYPE 4CA
TENSION	(V)	480/240
AC/DC/DC PV/RF		AC
FASE	(PH)	3H
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODOS		L-L, L-N, L-G, N-G, H-L, H-N, H-G
MLV	(V)	6720/3360/3360/3310/8440/4220/4220
MCOV	(V)	610/150/305/305/815/510/510
IN	(kA)	20
I <sub>cc</sub>	(kA)	n/a
<i>cortocircuito</i>		
IMAX	(kA)	50
Características mecánicas		
TECNOLOGIA		MOV-GSG
CONFIGURACION DE RED		4 pole, 4W+G, Hi-Leg Delta
FORMA DE CONEXION		Screw Terminal (4-13AWG)
MONTAJE		Din Rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DESCONEXION SEGURA		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
WEIGHT		0.79 lbs
Normas		
Normas ambientales		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA2
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Código		
821130224555		

