




CITEL

UL TYPE 4CA - I_{max} 50kA - I_n 20kA - Modular

DAC54VGUS-480DCT



- ▶ VG Technology
- ▶ UL1449 Type 4CA
- ▶ 50kA Surge Current Rating
- ▶ Visual fault indicator and remote contacts
- ▶ 10-Year warranty

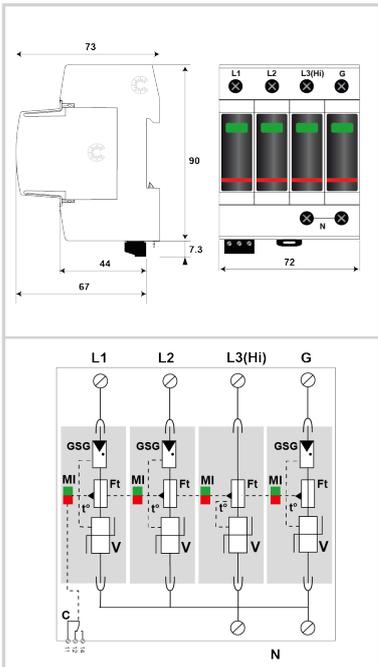

| Características eléctricas | | |
|----------------------------|------|--------------------------------------|
| POWER SPD TYPE | | UL1449 5th Ed. TYPE 4CA |
| TENSION | (V) | 480/240 |
| AC/DC/DC PV/RF | | AC |
| FASE | (PH) | 3H |
| AMPS | (A) | N/A |
| AMBIENT MIN | (C) | -40 |
| AMBIENT MAX | (C) | +85 |
| MODOS | | L-L, L-N, L-G, N-G, H-L, H-N, H-G |
| MLV | (V) | 6720/3360/3360/3310/8440/4220/4220 |
| MCOV | (V) | 610/150/305/305/815/510/510 |
| IN | (kA) | 20 |
| I _{cc} | (kA) | n/a |
| <i>cortocircuito</i> | | |
| IMAX | (kA) | 50 |
| Características mecánicas | | |
| TECNOLOGIA | | MOV-GSG |
| CONFIGURACION DE RED | | 4 pole, 4W+G, Hi-Leg Delta |
| FORMA DE CONEXION | | Screw Terminal (4-13AWG) |
| MONTAJE | | Din Rail |
| MATERIAL | | Thermoplastic UL94-V0 |
| NEMA RATING (IP RATING) | | NEMA 2 (IP20) |
| DESCONEXION SEGURA | | Disconnection via fuse-link |
| REAL-TIME DIAGNOSTICS | | Visual indicator and remote contacts |
| DIMENSIONS | | See diagram |
| WEIGHT | | 0.79 lbs |
| Normas | | |
| UL STANDARD | | UL1449 5th Edition |
| UL CATEGORY | | VZCA2 |
| UL FILE NUMBER | | E326289 |
| NORMAS | | NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| ENVIRONMENTAL STANDARDS | | ROHS |
| Código | | |
| 821130224555 | | |

