





# CITEL

## UL121201 Hazardous Locations- In 5kA


### DLA-06D3-Ex



- Hybrid GDT-TVS Technology
- UL497B LISTED
- UL121201 Hazardous Locations
- 20kA I<sub>max</sub> (1x-8/20us)
- 5kA I<sub>imp</sub> (2x-10/350us)
- 5kA I<sub>n</sub> (10x-8/20us)
- Modular
- 2W+SHIELD+G

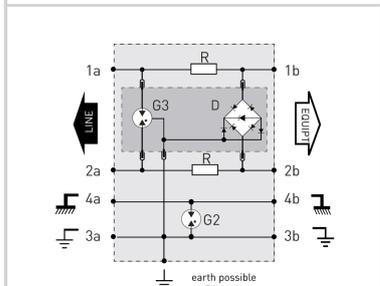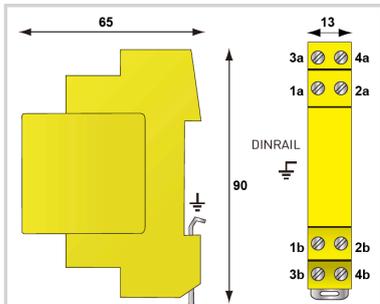

**G: 3-electrode gas tube**  
**Gb: 2-electrode gas tube**  
**R: Resistor**  
**D: Clamping diode**

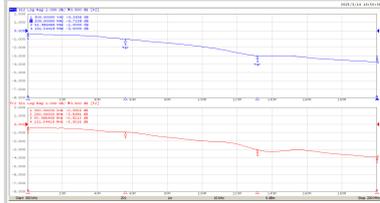

#### Electrical Characteristics

Network		RS422, RS485
Nominal line voltage	Un	6 V
Max. DC operating voltage	Uc	8 Vdc
Cut-off frequency -3dB, 100 ohm system	f max.	> 115 MHz
Cut-off frequency -1dB, 100 ohm system	f max.	> 50 MHz
Max. load current @25°C	IL	300 mA
Max. discharge current max. withstand @ 8/20 μs by pole	I <sub>max</sub>	20 kA
Nominal discharge current C2 Category	I <sub>n</sub>	5 kA
Protection Level C3 (10/1000μs), 300 applications@10 A, Y-Y (Line/Line)	Up	20 V
Protection Level C3 (10/1000μs), 300 applications@10 A, X-C (Line/Earth)	Up	20 V
Impulse current D1 (10/350μs), 2 applications, X-C (Line/Earth)	I <sub>imp</sub>	5 kA
Line resistance (± 10%)		4.7 Ohm

#### Mechanical Characteristics

Technology		GDT+TVS diode
Connection to Network		By screw terminal: cross section 0.5-2.5mm <sup>2</sup>
Format		Din Rail Base-Plug-in Module
Operating temperature	Tu	-40/+85°C
Protection rating		IP20
Failsafe mode		Short-circuit
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		1 pair (2W+Shield+G)
CONNECTION METHOD		Screw terminal
MOUNTING		Din rail
MATERIAL		Thermoplastic UL94-V0
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		DLAM-06D3

#### Standards

Certification		UL Listed
UL STANDARD		UL497B & UL121201 Hazardous Location
UL CATEGORY		QVQG & QVSI
UL FILE NUMBER		E184939 & E527349
UL121201 HAZARDOUS LOCATION		Class I, Division 2, Groups A, B, C & D: Operating. Temp. T5
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS

#### Part number

**897011**

