



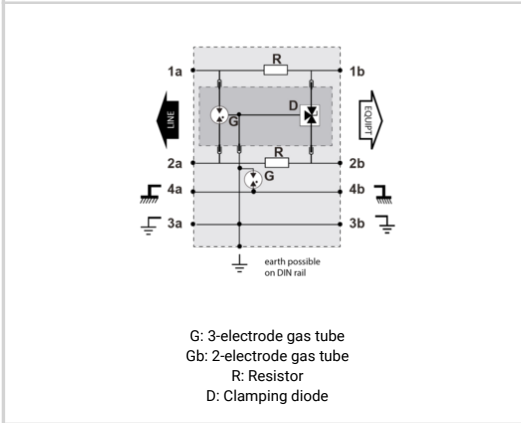

- Hybrid SAD-GDT Technology
- UL497B LISTED
- 20kA I_{max} (1x-8/20us)
- 5kA I_{imp} (2x-10/350us)
- 5kA I_n (10x-8/20us)
- Modular
- 2W+SHIELD+G

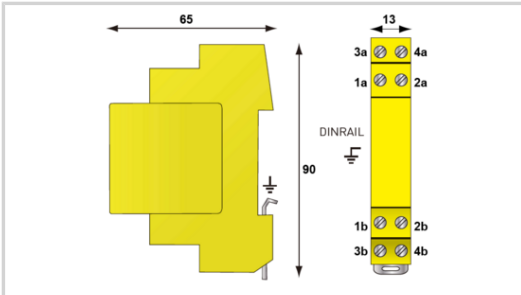

Electrical Characteristics

Line resistance (± 10%)		4.7 Ohm
DATA SPD TYPE		UL Listed for Hazardous Locations
VOLTS	(V)	6
WIRES		2W+Shield+G
LINE CURRENT MAX	(A)	0.3
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
RESIDUAL VOLTAGE	(V)	20
MCOV	(V)	8
IN		
10 impulses 8/20us	(kA)	5
IMAX		
8/20us	(kA)	20
Iimp		
10/350us	(kA)	5
DATA SPEED	(Mbps)	10/100
FREQUENCY	(MHz)	up to 10
INSERTION LOSS (@ FREQ)	(db)	< 1
CAPACITANCE	(pF)	< 50

Mechanical Characteristics

Failsafe mode		Short-circuit
TECHNOLOGY		SAD-GDT
NETWORK CONFIGURATION		1 Channel (2W+SHIELD+G)
CONNECTION METHOD		Screw terminal
MOUNTING		Din rail
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
SPARE PART		DLAM-06D3

Standards

Certification		UL Listed
UL STANDARD		UL497B & UL121201 Hazardous Location
UL CATEGORY		QVQG & QVSI
UL FILE NUMBER		E184939 & E527349
UL121201 HAZARDOUS LOCATION		Class I, Division 2, Groups A, B, C & D: Operating. Temp. T5
STANDARDS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS

Part number

897011

