



MDS600-480D-C-BPKIT

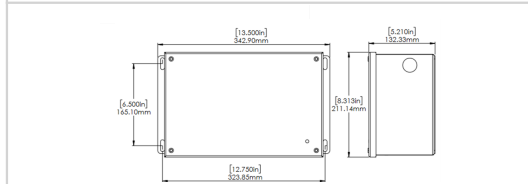

- ✦ Surge Capacity 400kA 8/20us per phase
- ✦ UL 1449 5th Ed. Listed Type 1
- ✦ All Mode Protection
- ✦ Surge Counter
- ✦ UL 1449 Nominal Discharge Current (I_n) 20kA (All models)
- ✦ UL 1449 Short-circuit Current Rating (SCCR) 200kA (All models)
- ✦ Remote Display
- ✦ Individual thermal disconnect
- ✦ Smart Diagnostics - % of protection present, audible, remote alarm, test/mute
- ✦ Serviceable Individual Replaceable Modules
- ✦ UL1283 Filter
- ✦ Standard 10-year warranty

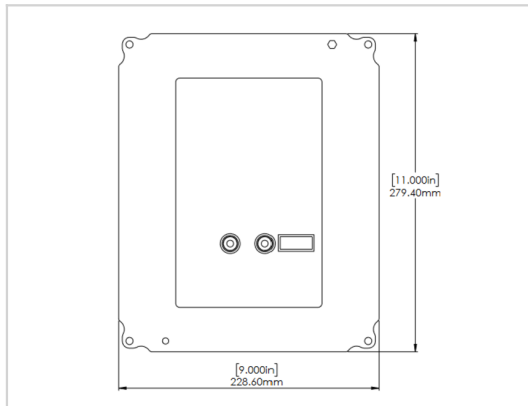

| Características eléctricas | | |
|-------------------------------|------|--|
| POWER SPD TYPE | | UL1449 TYPE 1 LISTED |
| TENSION | (V) | 480 |
| AC/DC/DC PV/RF | | AC |
| FASE | (PH) | 3D |
| AMPS | (A) | N/A |
| AMBIENT MIN | (C) | -40 |
| AMBIENT MAX | (C) | +85 |
| MODOS | | L-L, L-G |
| VPR | (V) | 1500/1500 |
| MCOV | (V) | 550/550 |
| IN | (kA) | 20 |
| I _{cc} cortocircuito | (kA) | 200 |
| IMAX | (kA) | 400 |
| Características mecánicas | | |
| TECNOLOGIA | | Multi-TMOV |
| CONFIGURACION DE RED | | 3PH, 3W+G, Delta |
| FORMA DE CONEXION | | PHASE WIRES, 6 ft, #10 AWG, DIAGNOSTIC PANEL-6 ft. Cable Harness |
| MONTAJE | | FLANGE MOUNT-ENCLOSURE, SURFACE MOUNT- DIAGNOSTIC FACE PLATE |
| MATERIAL | | Steel |
| NEMA RATING (IP RATING) | | FLANGE MOUNT ENCLOSURE-NEMA 4 |
| DESCONEXION SEGURA | | Yes, no upstream over current protection required |
| REAL-TIME DIAGNOSTICS | | % of protection present LED, audible alarm, remote contacts and surge counter. |
| DIMENSIONS | | See diagram |
| WEIGHT | | 8 lbs |
| Normas | | |
| Certificación | | UL Listed |
| UL STANDARD | | UL1449 5th Edition, UL1283 |
| UL CATEGORY | | VZCA, VZCA7, FOKY, FOKY7 |
| UL FILE NUMBER | | E326289, E467909 |
| ANSI/IEEE C62.41 | | Category C 20kV/10kA |
| ENVIRONMENTAL STANDARDS | | ROHS |
| Código | | |
| 8906311 | | |