





CITEL

UL TYPE 4CA - I_{max} 22kA - I_n 10kA

MLPXU-277L-W-HE-Ex



- MOV Technology
- UL121201-Hazardous Locations
- UL1449 Type 4CA
- for 120-277Vac LED applications
- I_{max} 20kA, I_n 10kA
- LED indicator
- IP67
- ANSI/IEEE C136.2 Extreme
- ANSI/IEEE C62.41 Category C
- 10-year Warranty

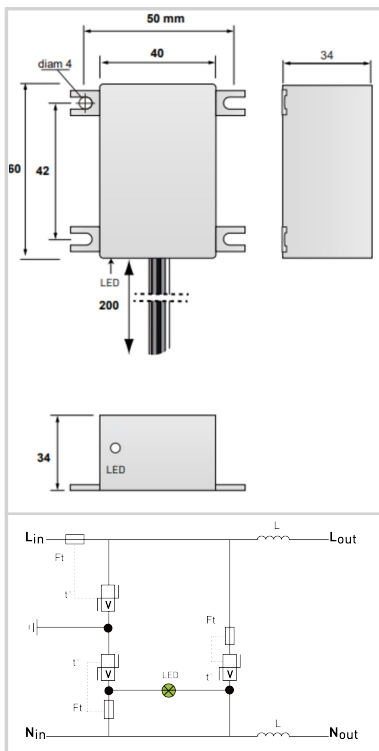

Características eléctricas	
POWER SPD TYPE	UL1449 TYPE 4CA for Hazardous Locations
TENSION (V)	277
AC/DC/DC PV/RF	AC
FASE (PH)	1
AMPS (A)	8
AMBIENT MIN (C)	-40
AMBIENT MAX (C)	+75
MODOS	L-L, L-G, L-N, N-G
MLV (V)	1280/1190/1220
MCOV (V)	320/320/320
IN (kA)	10
I _{cc cortocircuito} (kA)	n/a
IMAX (kA)	22
Características mecánicas	
TECNOLOGIA	Hybrid Inductor+Thermal-MOV
CONFIGURACION DE RED	2 pole, 2W+G, Single/Spilt Phase
FORMA DE CONEXION	150mm/5.97" #16 AWG Lead Wires
MONTAJE	FLANGE MOUNT
MATERIAL	Thermoplastic UL94-V0
NEMA RATING (IP RATING)	NEMA 6P (IP67)
DESCONEXION SEGURA	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	LED Indicator
DIMENSIONS	See diagram
WEIGHT	0.30 lbs
Normas	
Certificación	cRUus
Normas ambientales	EU RoHS
UL STANDARD	UL1449 5th Edition & UL121201
UL CATEGORY	VZCA2, VZCA8 & VZCH, VZCH7
UL FILE NUMBER	E326289, E527348
UL121201 HAZARDOUS LOCATION	Class I, Division 2, Groups A, B, C & D: Operating Temp. T5
NORMAS	IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ANSI/IEEE C62.41	Category C 20kV/10kA
ANSI/IEEE C136.2	Extreme Category 20kV/10kA
Código	
897016	

