




CITEL

UL TYPE 4CA - I_{max} 22kA - I_n 10kA

MLPXU-277L-W-HE/ON



- MOV Technology
- for 120-277Vac LED applications
- I_{max} 20kA, I_n 10kA
- Non-Disconnecting LED Indicator
- IP67
- ANSI/IEEE C136.2 Extreme
- ANSI/IEEE C62.41 Category C
- UL Type 4CA
- 10-year Warranty

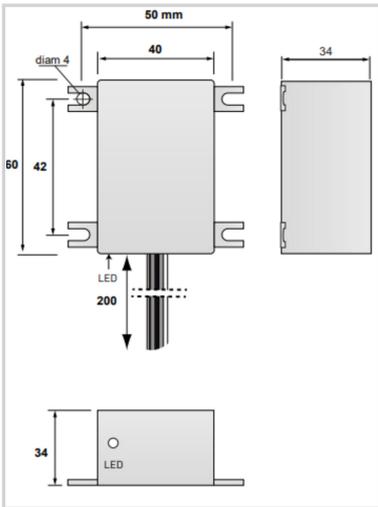

Características eléctricas		
POWER SPD TYPE		UL1449 5th Ed. TYPE 4CA
TENSION	(V)	277
AC/DC/DC PV/RF		AC
FASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+75
MODOS		L-L, L-G, L-N, N-G
MLV	(V)	1570/1600/1490
MCOV	(V)	320/320/320
IN	(kA)	10
I _{cc} <i>cortocircuito</i>	(kA)	n/a
IMAX	(kA)	22
Características mecánicas		
TECNOLOGIA		Thermal-MOV
CONFIGURACION DE RED		2 pole, 2W+G, Single/Spilt Phase
FORMA DE CONEXION		150mm/5.97" #16 AWG Lead Wires
MONTAJE		FLANGE MOUNT
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 6P (IP67)
DESCONEXION SEGURA		Disconnection via fuse-link
REAL-TIME DIAGNOSTICS		Non-Disconnecting LED Power Indicator
DIMENSIONS		See diagram
WEIGHT		0.30 lbs
Normas		
Certificación		cRUus
Normas ambientales		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA2, VZCA8
UL FILE NUMBER		E326289
NORMAS		IEC 61643-11, NOM-003-SCFI-2014, NOM-001-SCFI-1993
ANSI/IEEE C62.41		Category C 20kV/10kA
ANSI/IEEE C136.2		Extreme Category 20kV/10kA
Código		
7113197		

