




# CITEL

## UL TYPE 1 SPD - I<sub>max</sub> 100kA - I<sub>n</sub> 20kA - Modular DIN RAIL

### DAC104US-277Y



- UL1449 5th edition
- Type 1 SPD
- I<sub>max</sub>-100kA
- I<sub>n</sub>-20kA
- Visual fault indicator and remote contacts
- Pluggable/Replaceable Modules
- 10-Year warranty

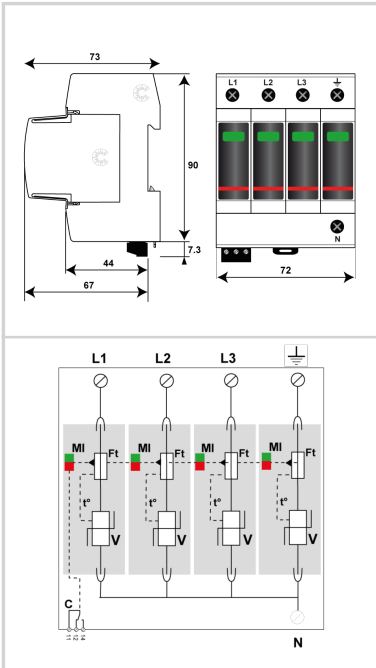

Electrical Characteristics		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
VOLTS	(V)	277/480, 120/208, 230/400, 240/415
AC/DC/DC PV/RF		AC
PHASE	(PH)	3Y
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODES		L-L, L-N, L-G, N-G
VPR	(V)	2000/1200/1800/1000
MCOV	(V)	770/385/705/320
IN	(kA)	20
15 impulses 8/20μs		
SCCR	(kA)	200
IMAX	(kA)	100
8/20μs		
Mechanical Characteristics		
TECHNOLOGY		Multi-MOV
NETWORK CONFIGURATION		3PH, 4W+G, Wye
CONNECTION METHOD		Screw Terminal (4-14AWG Solid Wire or 6-14AWG Stranded)
MOUNTING		DIN RAIL
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
WEIGHT		1.32 lbs
Standards		
Certification		UL Listed
Environmental standards		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number		
<b>55110132</b>		

