




CITEL

UL TYPE 1 SPD - I_{max} 50kA - I_n 20kA - AC Panel Mount

M50-120T-A-RA



- Hybrid MOV-GSG Technology
- UL1449 Type 1 LISTED
- 50kA Surge Current Rating per mode
- Extended life with no leakage current
- Visual LED fault indicator, audible alarm & remote contacts
- NEMA 6 (exceeds NEMA 4X or 4)
- 10-Year warranty

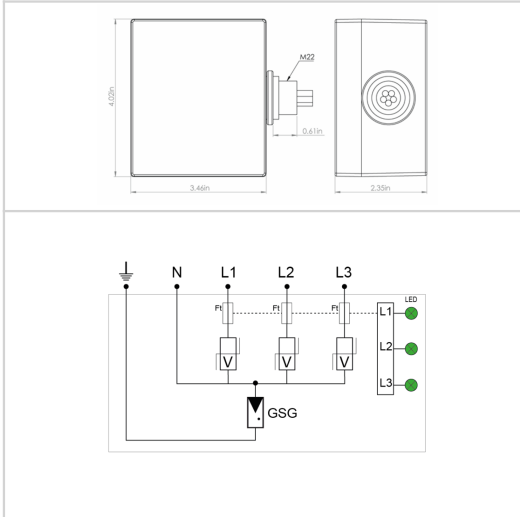

Características eléctricas		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
TENSION	(V)	240/120
AC/DC/DC PV/RF		AC
FASE	(PH)	1S
AMPS	(A)	N/A
AMBIENT MIN	(C)	-35
AMBIENT MAX	(C)	+80
MODOS		L-L, L-N, L-G, N-G
VPR	(V)	1200/700/1200/1200
MCOV	(V)	280/140/140/120
IN	(kA)	20
I _{cc} cortocircuito	(kA)	150
IMAX	(kA)	50
Características mecánicas		
Peso		0.945 kg
TECNOLOGIA		MOV-GSG
CONFIGURACION DE RED		1PH, 3W+G, Split Phase
FORMA DE CONEXION		36" #12 AWG LEADS
MONTAJE		SIDE MOUNT, THREADED M22 (1/2" NPT ADAPTER)
MATERIAL		Aluminum cast
NEMA RATING (IP RATING)		6 (IP66)
DESCONEXION SEGURA		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		LED, audible alarm and remote contacts
REMOTE CONTACT CONNECTION		NO/NC-Wire 3ft, 22 Ga.
DIMENSIONS		See diagram
WEIGHT		2.5 lbs.
Normas		
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
ENVIRONMENTAL STANDARDS		ROHS
Código		
751106		

