




# CITEL

## UL TYPE 1 SPD - I<sub>max</sub> 100kA - I<sub>n</sub> 20kA - Modular DIN RAIL

### DAC104US-277Y/G



- UL1449 5th edition
- Type 1 SPD
- I<sub>max</sub>-100kA
- I<sub>n</sub>-20kA
- Visual fault indicator and remote contacts
- Pluggable/Replaceable Modules
- 10-Year warranty

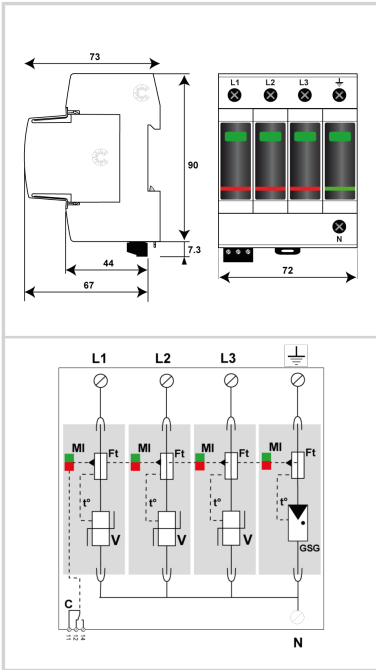

#### Electrical Characteristics

POWER SPD TYPE		UL1449 TYPE 1 LISTED
VOLTS	(V)	277/480, 120/208, 230/400, 240/415
AC/DC/DC PV/RF		AC
PHASE	(PH)	3Y
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODES		L-L, L-N, L-G, N-G
VPR	(V)	2000/1200/1500/1200
MCOV	(V)	770/385/385/277
IN	(kA)	20
15 impulses 8/20μs		
SCCR	(kA)	200
IMAX	(kA)	100
8/20μs		
RELATIVE HUMIDITY	(%)	95%

#### Mechanical Characteristics

TECHNOLOGY		Multi-MOV+GSG
NETWORK CONFIGURATION		3PH, 4W+G, Wye
CONNECTION METHOD		Screw Terminal (4-14AWG Solid Wire or 6-14AWG Stranded)
MOUNTING		DIN RAIL
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
WEIGHT		1.32 lbs

#### Standards

Certification		UL Listed
Environmental standards		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993

#### Part number

**55110133**

