




CITEL

UL TYPE 2 LISTED SPD - I_{max} 220kA per phase - I_n 20kA - NEMA 3R/4 /12

MS200F-277Y-C



- ▶ Multi-TMOV Technology
- ▶ UL1449 Type 2 LISTED
- ▶ UL1283 LISTED EMI/RFI Filter
- ▶ 220kA Surge Current Rating
- ▶ Connection-Parallel
- ▶ Operating Frequency-47Hz-63Hz
- ▶ Response time- <50 ns
- ▶ Visual fault indicator
- ▶ Surge Counter
- ▶ 10-Year warranty

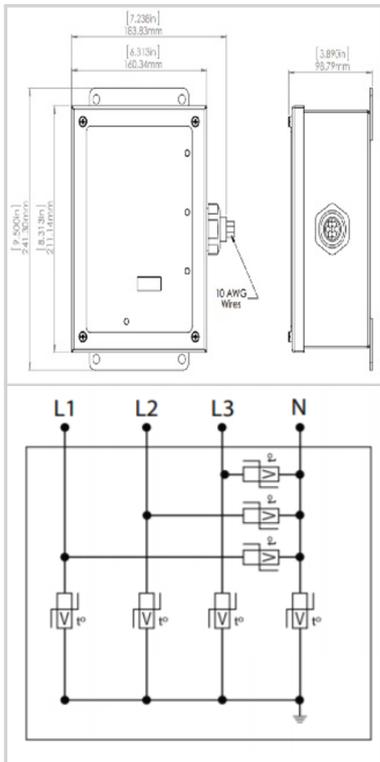

Características eléctricas	
POWER SPD TYPE	UL1449 TYPE 2 LISTED
TENSION	(V) 277/480
AC/DC/DC PV/RF	AC
FASE	(PH) 3Y
AMPS	(A) N/A
AMBIENT MIN	(C) -35
AMBIENT MAX	(C) 85
MODOS	L-L, L-N, L-G, N-G
VPR	(V) 1800/1000/1200/1000
MCOV	(V) 640/320/320/320
IN	(kA) 20
I _{cc} cortocircuito	(kA) 150
IMAX	(kA) 220
Características mecánicas	
TECNOLOGIA	Multi-TMOV
CONFIGURACION DE RED	3PH, 4W+G, Wye
FORMA DE CONEXION	36" #10 AWG LEADS
MONTAJE	FLANGE MOUNT
MATERIAL	Steel
NEMA RATING (IP RATING)	NEMA 3R,4, 12 (IP65)
DESCONEXION SEGURA	Disconnection via fuse-link
REAL-TIME DIAGNOSTICS	% of protection present LED, audible alarm, remote contacts and surge counter.
DIMENSIONS	See diagram
WEIGHT	6 lbs
Normas	
Certificación	UL Listed
Normas ambientales	EU RoHS
UL STANDARD	UL1449 5th Edition
UL CATEGORY	VZCA, VZCA7, FOKY, FOKY7
UL FILE NUMBER	E326289
NORMAS	NOM-003-SCFI-2014
Código	
890225	

