




# CITEL

## UL TYPE 1 SPD - I<sub>max</sub> 80kA - I<sub>n</sub> 20kA - Modular DIN RAIL

### DAC82US-120S/G



- ▶ UL1449 5th edition
- ▶ Type 1 SPD
- ▶ I<sub>max</sub>-80kA
- ▶ I<sub>n</sub>-20kA
- ▶ Visual fault indicator and remote contacts
- ▶ Pluggable/Replaceable Modules
- ▶ QR Code Linked Installation Sheet
- ▶ 10-Year warranty

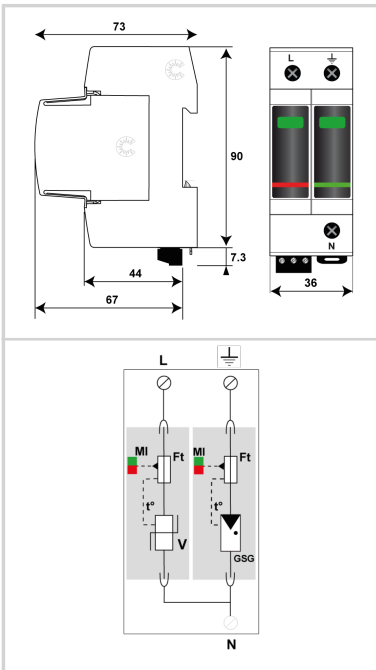

Características eléctricas		
POWER SPD TYPE		UL1449 TYPE 1 LISTED
TENSION	(V)	120
AC/DC/DC PV/RF		AC
FASE	(PH)	1
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODOS		L-N, L-G, N-G
VPR	(V)	800/1500/1200
MCOV	(V)	210/255/255
IN	(kA)	20
I <sub>cc</sub> cortocircuito	(kA)	200
IMAX	(kA)	80
RELATIVE HUMIDITY	(%)	95%
Características mecánicas		
TECNOLOGIA		Multi-MOV+GSG
CONFIGURACION DE RED		1PH, 2W+G, Split Phase
FORMA DE CONEXION		Screw Terminal (4-14AWG)
MONTAJE		DIN RAIL
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
DESCONEXION SEGURA		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
WEIGHT		1.20 lbs
Normas		
Certificación		UL Listed
Normas ambientales		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
NORMAS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Código		
55110022		

