




# CITEL

## UL TYPE 1 SPD - I<sub>max</sub> 80kA - In 20kA -Modular DIN RAIL

### DAC82US-240T/NN



- ▶UL1449 5th edition
- ▶Type 1 SPD
- ▶I<sub>max</sub>-80kA
- ▶In-20kA
- ▶Visual fault indicator and remote contacts
- ▶Pluggable/Replaceable Modules
- ▶QR Code Linked Installation Sheet
- ▶10-Year warranty

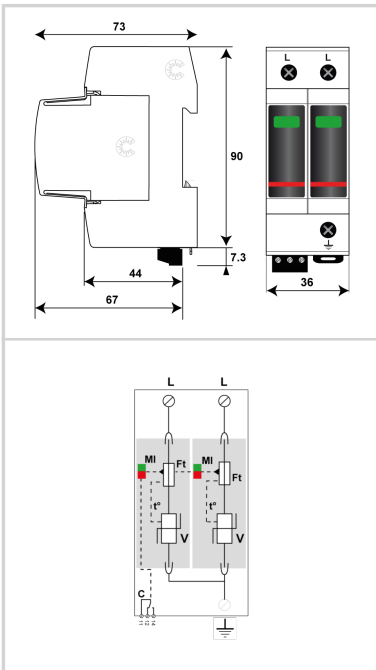

Electrical Characteristics		
POWER SPD TYPE		UL1449 OPEN TYPE 1 LISTED
VOLTS	(V)	480/240
AC/DC/DC PV/RF		AC
PHASE	(PH)	1S
AMPS	(A)	N/A
AMBIENT MIN	(C)	-40
AMBIENT MAX	(C)	+85
MODES		L-L, L-G
VPR	(V)	2500/-/1500/-
MCOV	(V)	840/-/420/-
IN	(kA)	20
<i>15 impulses 8/20μs</i>		
SCCR	(kA)	200
IMAX	(kA)	80
<i>8/20μs</i>		
RELATIVE HUMIDITY	(%)	95%
Mechanical Characteristics		
TECHNOLOGY		Multi-MOV
NETWORK CONFIGURATION		2 pole, 2W+G, Single/Spilt Phase
CONNECTION METHOD		Screw Terminal (4-14AWG)
MOUNTING		DIN RAIL
MATERIAL		Thermoplastic UL94-V0
NEMA RATING (IP RATING)		NEMA 2 (IP20)
FAIL-SAFE BEHAVIOR		Yes, no upstream over current protection required
REAL-TIME DIAGNOSTICS		Visual indicator and remote contacts
DIMENSIONS		See diagram
WEIGHT		0.60
Standards		
Certification		UL Listed
Environmental standards		EU RoHS
UL STANDARD		UL1449 5th Edition
UL CATEGORY		VZCA, VZCA7
UL FILE NUMBER		E326289
STANDARDS		NOM-003-SCFI-2014, NOM-001-SCFI-1993
Part number		
<b>55110026</b>		

