




CITEL

UL TYPE 1 SPD - I_{max} 80kA - I_n 20kA - Modular DIN RAIL

DAC84US-230Y



- UL1449 5th edition
- Type 1 SPD
- I_{max}-80kA
- I_n-20kA
- Visual fault indicator and remote contacts
- Pluggable/Replaceable Modules
- QR Code Linked Installation Sheet
- 10-Year warranty

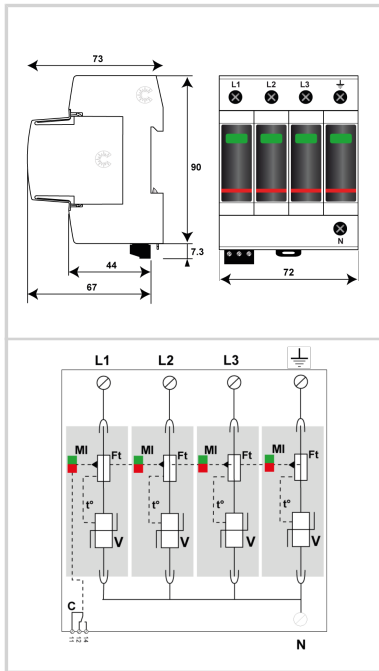

Características eléctricas

| | | |
|---|----------------------|--------------------|
| POWER SPD TYPE | UL1449 TYPE 1 LISTED | |
| TENSION | (V) | 400/230 |
| AC/DC/DC PV/RF | AC | |
| FASE | (PH) | 3Y |
| AMPS | (A) | N/A |
| AMBIENT MIN | (C) | -40 |
| AMBIENT MAX | (C) | +85 |
| MODOS | L-L, L-N, L-G, N-G | |
| VPR | (V) | 1800/1000/1800/900 |
| MCOV | (V) | 640/320/595/275 |
| IN | (kA) | 20 |
| I _{cc} <i>cortocircuito</i> | (kA) | 200 |
| IMAX | (kA) | 80 |
| RELATIVE HUMIDITY | (%) | 95% |

Características mecánicas

| | | |
|-------------------------|---|--|
| TECNOLOGIA | Multi-MOV | |
| CONFIGURACION DE RED | 3PH, 4W+G, Wye | |
| FORMA DE CONEXION | Screw Terminal (4-14AWG) | |
| MONTAJE | DIN RAIL | |
| MATERIAL | Thermoplastic UL94-V0 | |
| NEMA RATING (IP RATING) | NEMA 2 (IP20) | |
| DESCONEXION SEGURA | Yes, no upstream over current protection required | |
| REAL-TIME DIAGNOSTICS | Visual indicator and remote contacts | |
| DIMENSIONS | See diagram | |
| WEIGHT | 1.32 lbs | |

Normas

| | | |
|--------------------|--------------------------------------|--|
| Certificación | UL Listed | |
| Normas ambientales | EU RoHS | |
| UL STANDARD | UL1449 5th Edition | |
| UL CATEGORY | VZCA, VZCA7 | |
| UL FILE NUMBER | E326289 | |
| NORMAS | NOM-003-SCFI-2014, NOM-001-SCFI-1993 | |

Código

55110057

