




CITEL

UL TYPE 1 SPD - I_{max} 80kA - I_n 20kA - Modular DIN RAIL

DAC82US-230S



- ▶ UL1449 5th edition
- ▶ Type 1 SPD
- ▶ I_{max}-80kA
- ▶ I_n-20kA
- ▶ Visual fault indicator and remote contacts
- ▶ Pluggable/Replaceable Modules
- ▶ QR Code Linked Installation Sheet
- ▶ 10-Year warranty

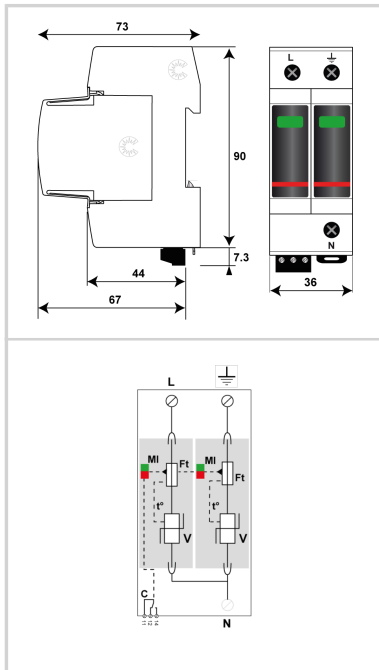

| Características eléctricas | | |
|-------------------------------|------|---|
| POWER SPD TYPE | | UL1449 TYPE 1 LISTED |
| TENSION | (V) | 120 |
| AC/DC/DC PV/RF | | AC |
| FASE | (PH) | 1 |
| AMPS | (A) | N/A |
| AMBIENT MIN | (C) | -40 |
| AMBIENT MAX | (C) | +85 |
| MODOS | | L-N, L-G, N-G |
| VPR | (V) | 1000/1800/900 |
| MCOV | (V) | 320/595/275 |
| I _N | (kA) | 20 |
| I _{cc} cortocircuito | (kA) | 200 |
| I _{MAX} | (kA) | 80 |
| RELATIVE HUMIDITY | (%) | 95% |
| Características mecánicas | | |
| TECNOLOGIA | | Multi-MOV |
| CONFIGURACION DE RED | | 1PH, 2W+G, Split Phase |
| FORMA DE CONEXION | | Screw Terminal (4-14AWG) |
| MONTAJE | | DIN RAIL |
| MATERIAL | | Thermoplastic UL94-V0 |
| NEMA RATING (IP RATING) | | NEMA 2 (IP20) |
| DESCONEXION SEGURA | | Yes, no upstream over current protection required |
| REAL-TIME DIAGNOSTICS | | Visual indicator and remote contacts |
| DIMENSIONS | | See diagram |
| WEIGHT | | 1.20 lbs |
| Normas | | |
| Certificación | | UL Listed |
| Normas ambientales | | EU RoHS |
| UL STANDARD | | UL1449 5th Edition |
| UL CATEGORY | | VZCA, VZCA7 |
| UL FILE NUMBER | | E326289 |
| NORMAS | | NOM-003-SCFI-2014, NOM-001-SCFI-1993 |
| Código | | |
| 55110023 | | |

